




Big Gun Sprinkler

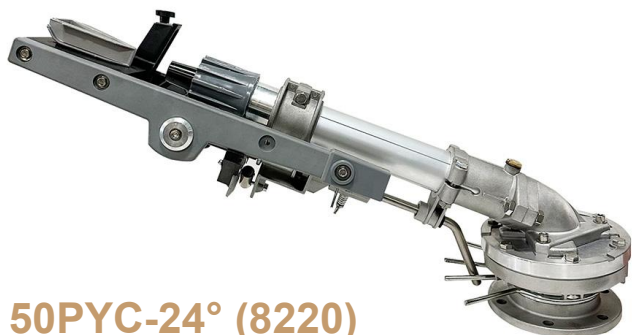

50PYC-24° (8220)

Vertical rocker spray gun

PRODUCT PARAMETERS

Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	15.5 - 84.0m³/h
Spray range:	27.9 - 56m
Interface:	Flange
Inclination angle:	24°
Weight:	8.5KG (9.2KG with flange)
Specification:	Box 85*22.5*24cm



50PYC-24°

Vertical rocker irrigation gun Lengthen

PRODUCT PARAMETERS

Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	17 - 82.8m³/h
Spray range:	25 - 58m
Interface:	Flange
Inclination angle:	24°
Weight:	8.8KG (9.5KG with flange)
Specification:	Box 97.5*22.5*24cm



50PYC-44°

Vertical rocker spray gun

PRODUCT PARAMETERS

Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	15.5 - 86.4m³/h
Spray range:	28 - 56m
Spray height:	11.7 - 26.5m
Interface:	Flange
Inclination angle:	44°
Weight:	8.5KG (9.2KG with flange)
Specification:	Box 85*22.5*24cm



50PYC-44°

Vertical rocker dust-removing spray gun Lengthen

PRODUCT PARAMETERS

Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	17.0 - 82.8m³/h
Spray range:	25 - 56m
Spray height:	11.7 - 26.5m
Interface:	Flange Interface
Inclination angle:	44°
Weight:	8.8KG (9.5KG with flange)
Specification:	Box 97.5*22.5*24cm



Big Gun Sprinkler



S50-24°

Vertical rocker spray gun

PRODUCT PARAMETERS

Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	15.3 - 82.0m³/h
Spray range:	29 - 57m
Interface:	Flange, Internal Thread Interface
Inclination angle:	24°
Weight:	8.3KG (9KG with flange)
Specification:	Box 90*23*27.5cm



S50-44°

Vertical rocker spray gun

PRODUCT PARAMETERS

Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	15.3 - 82.8m³/h
Spray range:	29 - 51m
Interface:	Flange, internal thread
Inclination angle:	44°
Weight:	8.3KG (9KG with flange)
Specification:	Box 90*23*27.5cm



PL35T

Turbospray gun with adjustable elevation angle

PRODUCT PARAMETERS

Inlet diameter:	35mm
Nozzle diameter:	8 - 16mm
Pressure:	2.0 - 5.0bar
Flow rate:	4.5 - 21.4m³/h
Spray range:	20 - 35.5m
Spray height:	11.7 - 26.5m
Interface:	1.5 inch threaded interface
Inclination angle:	adjustable from 0 to 48°
Weight:	1.7kg per piece
Specification:	49*11.6*22CM per piece



PL35T-S

Turbo spray gun with adjustable elevation angle

PRODUCT PARAMETERS

Inlet diameter:	35mm
Nozzle diameter:	8 - 16mm
Pressure:	2.0 - 5.0bar
Flow rate:	4.5 - 21.4m³/h
Spray range:	20 - 35.5m
Spray height:	11.7 - 26.5m
Interface:	1.5 inch threaded interface
Inclination angle:	adjustable from 0 to 48°
Weight:	1.7kg per piece
Specification:	32*19.5*19CM per piece



Big Gun Sprinkler



W-40 (8222)

Turbo worm type spray gun

PRODUCT PARAMETERS

Inlet diameter:	40mm
Nozzle diameter:	10 - 24mm
Pressure:	2.0 - 6.0bar
Flow rate:	7 - 56m³/h
Spray range:	17 - 43m
Interface:	1.5 inch threaded interface
Tilt angle:	23°
Weight:	Box 5.2kg
Specification:	Box 60*23*20.5



W-50 (8225)

Turbo worm type spray gun

PRODUCT PARAMETERS

Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm (default with 16-22mm)
Pressure:	2.0 - 8.0bar
Flow rate:	12.9 - 100m³/h
Spray range:	25 - 55m
Interface:	Flange
Inclination angle:	24°
Weight:	7.3kg (with flange 8kg)
Specification:	Box 81*22.5*28cm



PL40T-S

Adjustable pitch worm gear spray gun

PRODUCT PARAMETERS

Inlet diameter:	40mm
Nozzle diameter:	10 - 24mm
Pressure:	2.0 - 6.0bar
Flow rate:	7 - 56m³/h
Range:	17 - 43m
Interface:	1.5 inch threaded interface
Tilt angle:	24-28° adjustable
Weight:	5.2KG
Specification:	Box 65*23*25.5cm



PL45T-S

Turbo spray gun with adjustable elevation angle

PRODUCT PARAMETERS

Inlet diameter:	45mm
Nozzle diameter:	10 - 24mm
Pressure:	2.0 - 6.0bar
Flow rate:	7.2-56.8m³/h
Range:	19 - 46m
Connection:	flange and 1.5 inch threaded interface
Tilt angle:	0- 48°
Weight:	5.9KG (6.7KG with flange)
Specification:	Box 76.5*23*25.5cm



Big Gun Sprinkler



PL50T

Turbo spray gun with adjustable elevation angle

PRODUCT PARAMETERS

Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm (default with 16-22mm)
Pressure:	2.0 - 8.0bar
Flow rate:	12.9 - 100m³/h
Range:	25 - 55m
Interface:	Flange
Tilt angle:	0-48°
Weight:	7.6kg (with flange 8.3kg)
Specification:	Box 81*22.5*28cm



PL55T-S

Multi-nozzle adjustable-elevation turbine spray gun

PRODUCT PARAMETERS

Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm (default with 16-22mm)
Pressure:	2.0 - 8.0bar
Flow rate:	12.9 - 100m³/h
Spray range:	25 - 55m
Interface:	Flange
Tilt angle:	0-48°
Weight:	7.5kg (with flange 8.4kg)
Specification:	Box 81*22.5*28cm



PL65T-S

Turbo spray gun with adjustable elevation angle

PRODUCT PARAMETERS

Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm (default with 16-22mm)
Pressure:	2.0 - 8.0bar
Flow rate:	14.8 - 102m³/h
Range:	25 - 58m
Interface:	Flange
Tilt angle:	0-48°
Weight:	7.9kg (with flange 8.6kg)
Specification:	Box 90*22.5*28cm



PL75T-S

Turbo spray gun with adjustable elevation angle

PRODUCT PARAMETERS

Inlet diameter:	70mm
Nozzle diameter:	18 - 36mm (default with 18-26mm)
Pressure:	2.0 - 8.0bar
Flow rate:	17.8 - 131.7m³/h
Range:	22 - 70m
Connection:	Flange
Tilt angle:	0-48° adjustable
Weight:	9.2kg (with flange 9.0kg)
Specification:	Box 97*24.8*29.6cm



Big Gun Sprinkler



HSR-8200

Size	Pressure	Flux	Radius	Material
1.5" (40,PY30)	3-5 kg	7-8 m³/h	17-23 m	Aluminum Core
2" (50,PY40)	4-6 kg	15-17 m³/h	23-30 m	Aluminum Core
2.5" (60,PY50)	4.5-7 kg	24-26 m³/h	34-36 m	Aluminum Core



HSR-8201

Size	Pressure	Flux	Radius	Material
1" (25,PY20)	3-4 kg	4-5 m³/h	15-20 m	Brass Core
1.5" (40,PY30)	3-5 kg	7-8 m³/h	18-23 m	Brass Core
2" (50,PY40)	4-6 kg	15-17 m³/h	23-30 m	Brass Core
2.5" (60,PY50)	4.5-7 kg	24-26 m³/h	34-36 m	Brass Core



HSR-8203

Size	Pressure	Flux	Radius	Material
1.5" (PY30)	2-4.5 kg	7-9 m³/h	20-25 m	Aluminum Core
2" (PY40)	3-5 kg	15-20 m³/h	25-30 m	Aluminum Core
2.5" (PY50)	3-5 kg	30-35 m³/h	30-40 m	Aluminum Core



HSR-8202

Size	Pressure	Flux	Radius	Material
1.5" (PY30)	2-4.5 kg	7-9 m³/h	20-25 m	Brass Core
2" (PY40)	3-5 kg	15-20 m³/h	25-30 m	Brass Core
2.5" (PY50)	3-5 kg	30-35 m³/h	30-40 m	Brass Core





Big Gun Sprinkler



HSR-8210 (2\"/>

Material: Aluminum Alloy

Base: Brass

Pressure: 1.5-5.0 kg

Flux: 9.5-39.4 m³/h

Radius: 20-43 m



HSR-8212 (1.5\"/>

Material: Aluminum Alloy

Base: Brass

Pressure: 2.0-6.0 kg

Flux: 9.1-31.9 m³/h

Radius: 19-29 m



HSR-8213 (1\"/>

Material: Aluminum Alloy

Base: Brass

Pressure: 1.5-4.0 kg

Flux: 1.2-6.1 m³/h

Radius: 12-19.5 m



HSR-8214 (1.25\"/>

Material: Aluminum Alloy

Base: Aluminum or Brass

Pressure: 3.5-5.0 kg

Flux: 14.3-16.5 m³/h

Radius: 23-31 m



HSR-8213B (1\"/>

Material: Aluminum

Base: Brass

Pressure: 1.5-4.0 kg

Flux: 1.8-3.6 m³/h

Radius: 12-17 m



HSR-8217 (1.5\"/>

Material: Aluminum

Base: Brass

Pressure: 2.0-5.0 kg

Flux: 5.1-24.8 m³/h

Radius: 16-29 m

HSR-80(3\"/>

Material	Pressure	Flux	Radius
Aluminum Alloy	3.0-8.0 kg	58.4-170m ³ /h	48-78 m