HighSight

water saving irrigation solution provider!





Company Profile

HighSight(Taizhou) Plastic Co.,ltd. is a professional manufacturer of water-saving products. Our products include Sprinkler Gun Impact Sprinkler, Micro Sprinkler, Dipper, Drip Arrow, Pop-up Sprinkler, Mist Sprinkler Series, Valves, PVC Pipes & Fittings, Clamp Saddle, Hose Clamp, Filter, Hole Puncher, Drip Hose &Tape, PVC hose and Fire Hose, etc. The products are widely applied in water-saving irrigation, agriculture, home gardening, stadium, greenhouse, gold course irrigation and industrial cooling - fields. We provide the solution for a substantial reduction of water consumption in agriculture and ensure increased irrigation efficiency.

Global Irrigation System Product Supplier





























INDEX

01 Impact Plastic sprinkler Series Page 01~12

13 Impact Metal sprinkler Series Page 13

14 Big Gun sprinkler Series Page 14~20

21 POP-UP Sprinkler Series Page 21

22 Garden 3-arm Sprinkler Page 22

23 Mid-Range Sprinkler Page23~24

25 Micro Sprinkler Page 25~31

32 Fittings Page 32~35

36 Micro Valve Series Page 36~37

38 Garden Water Timer Page 38

39 Irrigation Hose Page 39~42

43 PVC Ball Valve Series And Fittings Series Page 43~47

48 PVC DIN Pressure Fittings Series Page 48~50

51 PP Compression fittings Page 51~53

54 Irrigation Clamp & Accessories Page 54~55

Impact Plastic Sprinkler Series



HSR-8003B



USAGE

Designing for sustainable agriculture and landscape Irrigation;



HSR-8003N



HSR-8003D



HSR-8003A



HSR-8003M



HSR-8001C



HSR-8001A



HSR-8002B



HSR-8002A

PRODUCT PARAMETERS

Interface size	Nozzle diameter	Radius	Pressure	Flux	Material
1/2"M 3/4"M&3/4"F	2.5 2.8 3.0 3.2 3.5 4.0(mm)	9.5-13.0m	1.0~3.0bar	360~1030L/H	POM

Impact Plastic Sprinkler Series



HSR-8006B



USAGE

Designing for sustainable agriculture and landscape irrgation;

FEATURES

Size: 1/2″ M 3/4"M&3/4"F
Main material:POM;
Stainless steel springs and pivot pin;
UV radiation;



HSR-8006A



HSR-8006A



HSR-8006A



HSR-8006D



HSR-8006C

Performance data

Nozzle Size(MM)	2.5			2.8			3.0			3.2			3.5			4.0		
Pre.(bar)	2.0	3.0	4.0	2.0	3.0	4.0	1.0	2.0	3.0	1.0	2.0	3.0	1.0	2.0	3.0	1.0	2.0	3.0
Flow Rate(L/h)	360	450	510	450	550	630	360	510	630	410	570	700	490	660	810	600	850	1030
Rad.(m)	10.5	10.8	11.3	11	11.5	12	9.5	11.5	12	10	11.5	12	10	11.5	12	10.5	12	13

Impact Plastic Sprinkler Series



HSR-S8504B





HSR-8004B



HSR-8004A



HSR-8010C



HSR-8010A



HSR-8010A

PRODUCT PARAMETERS

Interface size	Nozzle diameter	Radius	Pressure	Flux	Material
1/2"M 3/4"M&3/4"F	Ø4.0mm	7-9m	1.0~3.0bar	600~1030L/H	POM

Impact Plastic Sprinkler Series



HSR-8008B



HSR-8007A



HSR-8007M



HSR-8008BC



HSR-8008A

Interface size	Nozzle diameter	Radius	Pressure	Flux	Material
3/4"M&3/4"F	5*2.5mm	11-17m	2.0~5.0bar	1150~2820LH	POM



HSR-8011B



HSR-8011A



HSR-8011C



HSR-8011D

Interface size	Nozzle diameter	Radius	Pressure	Flux	Material
3/4"M&3/4"F	Ø5.0×2.5mm	9-13m	1.0~4.0bar	900~1500L/H	POM

Impact Plastic Sprinkler Series



HSR-8014B



Nozzle Size(MM)	4.4*2.4			5.0*2.4		
Pre.(bar)	3.0	4.0	5.0	3.0	4.0	5.0
Flow Rate(L/h)	1070	1180	1350	1500	2000	2500
Rad.(m)	15.0	15.5	16.0	16.0	17.0	19.0



HSR-8014C



HSR-8014A



HSR-8014M



HSR-8021



HSR-8023

Interface size	Nozzle diameter	Radius	Pressure	Flux	Material
3/4"M&3/4"F	Ø4.0mm	10-13m	1.5~4.0bar	0.95-1.13 m³/h	POM/PP

Impact Plastic Sprinkler Series



HSR-8016A

PRODUCT PARAMETERS	
Interface size:	G3/4″
Radius:	7-15.5m
Pressure:	0.5~4.0bar
Flux:	1400~2200L/H
Material:	POM



HSR-8015A



HSR-8015AH



HSR-8016B



HSR-8016BH



HSR-8018A



HSR-8018B

Performance data

Nozzle Size(MM)	4.4*2.4			5.0*2.4		
Pre.(bar)	3.0	4.0	5.0	3.0	4.0	5.0
Flow Rate(L/h)	1290	1500	1650	1600	1850	2100
Rad.(m)	14.25	15	16.5	15	16.75	17



3/4"-1"

3/4"-1"

3/4"-3/4"

Features

- ¾" Male Thread;
- Main material:POM;
- Brass nozzles;
- Stainless Steel Pivot Pin and Springs;

HSR-8018M



3/4"-1"

3/4"-3/4"

3/4"-1"

HSR-8020B

PRODUCT PARAMETERS	
Interface size:	G1/2″ G3/4″
Radius:	9-13m
Pressure:	1.0~3.0bar
Flux:	1400~2200L/H
Material:	POM&copper-aluminium



HSR-8020B



HSR-8020A

Impact Plastic Sprinkler Series



HSR-8013E



FEATURES

- Size: 3/4"M & 3/4"F
- Main material:POM;
- Stainless steel springs and Pivot pin;
- Double nozzles design provides outstanding uniformity;
- UV radiation;
- Bayonet nozzle design and different color nozzles for easy and quick cleaning or replacement even while operating;



HSR-8013B



HSR-8013M



HSR-8013A



HSR-8013D



HSR-8012B



HSR-8012A

Performance data

Nozzle Size(MM)	4.0*2.5				4.5*2.5				4.8*2.5				5.0*2.5				5.0*2.5			
Pre.(bar)	2.0	3.0	4.0	5.0	2.0	3.0	4.0	5.0	1.0	2.0	3.0	4.0	2.0	3.0	4.0	5.0	1.0	2.0	3.0	4.0
Flow Rate(L/h)	1150	1430	1750	1980	1390	1720	2030	2310	1260	1680	2160	2520	1600	2000	2360	2620	1650	1920	2400	2820
Rad.(m)	11	12	13	13.5	11.5	13	14	14.5	11	14	15.5	16.8	11.5	13.5	14.5	15.5	11.8	14.4	16	17

Impact Plastic Sprinkler Series



HSR-8019M

PRODUCT PARAMETERS	
Interface size:	G1″
Radius:	12-18m
Pressure:	1.5~4.0bar
Flux:	1500~2400L/H
Material:	POM



HSR-8019B



HSR-8019BH



HSR-8022B

Nozzles

It offers ease of use in a range of projects with nozzle options suitable for different flow rates;



Ø3.2 Eye Ø5.0



HSR-8022E



HSR-8022D



HSR-8022M

Features

- ◆¾" Male/Female thread; 1" Female
- ◆Main material: POM;
- ◆Bayonet nozzle design and different color nozzles for easy and quick cleaning or replacement even while operating;
- ◆Press fitted plated weight into arm for proper impact and balancing.
- ◆Stainless steel pivot pin and springs

Performance data

Nozzle Size(MM)	5.0*Eye (Green)				5.0*Eye (Grey)			
Pre.(bar)	1.5	2.5	3.0	3.5	1.5	2.5	3.0	3.5
Flow Rate(L/h)	1500	1800	2000	2200	1650	1920	2200	2400
Rad.(m)	13	15	18	20	13.5	16	18.5	21

Impact Plastic Sprinkler Series



HSR-8012NB





3/4"

HSR-8012NM

PRODUCT PARAMETERS	
Interface size:	3/4″
Radius:	12-18m
Pressure:	2.0~4.0bar
Flux:	1.8-2.5 m³/h
Material:	POM



HSR-8031BP



HSR-8031B

PRODUCT PARAMETERS	
Interface size:	3/4″
Radius:	14.25-17m
Pressure:	1.5~4.0bar
Flux:	2800~3800L/H
Material:	POM



HSR-8027B



HSR-8027M



HSR-8027BD



HSR-8027MD

Interface size	Radius	Pressure	Flux	Material
1/2"	7-10m	1.5~4.0bar	0.95-1.13 m³/h	POM

Impact Plastic Sprinkler Series



HSR-8019M

HSR-8027A



HSR-8024

PRODUCT PARAMETERS	
Interface size:	G1″
Radius:	12-18m
Pressure:	1.5~4.0bar
Flux:	1500~2400L/H
Material:	POM

PRODUCT PARAMETERS	
Interface size:	1″
Radius:	14.25-17m
Pressure:	1.5~4.0bar
Flux:	2800~3800L/H
Material:	POM



HSR-8037M



HSR-8029

PRODUCT PARAMETERS	
Interface size:	G1″
Nozzle diameter:	Ø6.0/Ø6.5/Ø7.0x3.2mm
Radius:	12-18m
Pressure:	1.5~4.0bar
Flux:	1500~2400L/H
Material:	POM

PRODUCT PARAMETERS	
Interface size:	G1″
Radius:	15-20m
Pressure:	4.0~6.0bar
Flux:	1500~2400L/H
Material:	POM

Impact Plastic Sprinkler Series



3/4"-1"

HSR-8026C



HSR-8026A



HSR-8026E

Interface size:	G1″
Radius:	14.25-17m
Pressure:	1.5~4.0bar
Flux:	1290~2100L/H
Material:	POM

PRODUCT PARAMETERS

Interface size:	G1″
Radius:	14.25-17m
Pressure:	1.5~4.0bar
Flux:	1290~2100L/H
Material:	POM



HSR-8025M



HSR-8025D



HSR-8030C



HSR-8030A



HSR-8030B



HSR-8030M



HSR-8030E

Features

- 1" male/Female thread
- Main material:POM;
- Bayonet nozzle design for easy and quick cleaning or replacement even while operating;
- Stainless Steel Pivot Pin and Springs.

PRODUCT PARAMETERS

Interface size:	G1″
Nozzle diameter:	Ø6.5mm Ø3.2mm Ø3.0mm
Radius:	13-18m
Pressure:	1.5~4.0bar
Flux:	2600~4900L/H
Material:	PP/POM

Impact Plastic Sprinkler Series



HSR-8033



PRODUCT PARAMETERS	
Interface size:	G1.5″ G2.0″
Radius:	20-36m
Pressure:	2.0~6.0bar
Flux:	9.12-31.98 m³/h
Material:	POM



HSR-8039B



HSR-8039A



HSR-8028



HSR-8034

PRODUCT PARAMETERS	
Interface size:	G1″
Radius:	14.25-17m
Pressure:	1.5~4.0bar
Flux:	1290~2100L/H
Material:	POM

	HSR-8028	HSR-8034
Interface size:	G1″	G1″
Radius:	12-18m	18-28m
Pressure:	1.5~4.0bar	2.0~5.0bar
Flux:	1.5-2.3 m³/h	2.5-7 m³/h
Material:	POM	POM



HSR-8032M



HSR-8032B



HSR-8032A



HSR-8032F



HSR-8032C

Interface size	Radius	Pressure	Flux	Material
1/2" 1"	3-9m	3.0~5.0bar	2.0-5.7 m³/h	POM

Impact Metal Sprinkler Series



HSR-8100B 3/4″

Size	Pressure	Flux	Radiu
3/4"	0.5-4.0 kg	0.4-1.8 m³/h	3.0-16.5 m



HSR-8100A 3/4″



HSR-8105A 1/2″

Size	Pressure	Flux	Radiu
1/2",3/4"	2.0-4.0 kg	0.84-1.62 m3/h	10-20 m




HSR-8105B 3/4″



HSR-8102A 1/2″

Size	Pressure	Flux	Radiu
1/2",3/4"	1.3-3.0 kg	0.9-1.7 m³/h	6-13 m



HSR-8102B 3/4″



HSR-8103A 1/2″

Size	Pressure	Flux	Radiu
1/2",3/4"	2.0-4.0 kg	0.8-1.5 m³/h	8.0-14 m



HSR-8103B 3/4″



HSR-8106 3/4″

Size	Pressure	Flux	Radiu
3/4"	2.0-4.0 kg	0.84-1.62 m³/h	10-20 m



HSR-8107 3/4″



HSR-8112 1/2″

Size	Pressure	Flux	Radiu
1/2"	2.0-4.0 kg	0.84-1.62 m³/h	10-20 m



HSR-8113 1/2″



HSR-8122 3/4″

Size	Pressure	Flux	Radiu
3/4"	1.7-5.5 kg	0.51-3.27 m³/h	12-18 m



HSR-8109 3/4″



HSR-8101 3/4″

Size	Pressure	Flux	Radiu
3/4"	3.0-5.0kg	2.47-3.2m³/h	13-18m



HSR-8104 1″

Size	Pressure	Flux	Radiu
1"	4.0-6.5kg	3.43-7.44m³/h	12-20m



50PYC-24° (8220)

Vertical rocker spray gun

PRODUCT PARAMETERS	
Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	15.5 - 84.0m³/h
Spray range:	27.9 - 56m
Interface:	Flange
Inclination angle:	24°
Weight:	8.5KG (9.2KG with flange)
Specification:	Box 85*22.5*24cm



50PYC-24°

Vertical rocker irrigation gun Lengthen

PRODUCT PARAMETERS	
Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	17 - 82.8m³/h
Spray range:	25 - 58m
Interface:	Flange
Inclination angle:	24°
Weight:	8.8KG (9.5KG with flange)
Specification:	Box 97.5*22.5*24cm



50PYC-44°

Vertical rocker spray gun

PRODUCT PARAMETERS	
Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	15.5 - 86.4m³/h
Spray range:	28 - 56m
Spray height:	11.7 - 26.5m
Interface:	Flange
Inclination angle:	44°
Weight:	8.5KG (9.2KG with flange)
Specification:	Box 85*22.5*24cm



50PYC-44°

Vertical rocker dust-removing spray gunLengthen

PRODUCT PARAMETERS	
Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	17.0 - 82.8m³/h
Spray range:	25 - 56m
Spray height:	11.7 - 26.5m
Interface:	Flange Interface
Inclination angle:	44°
Weight:	8.8KG (9.5KG with flange)
Specification:	Box 97.5*22.5*24cm

Big Gun Sprinkler



S50-24°

Vertical rocker spray gun

PRODUCT PARAMETERS	
Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	15.3 - 82.0m³/h
Spray range:	29 - 57m
Interface:	Flange, Intemal Thread Interface
Inclination angle:	24°
Weight:	8.3KG (9KG with flange)
Specification:	Box 90*23*27.5cm



S50-44°

Vertical rocker spray gun

PRODUCT PARAMETERS	
Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm
Pressure:	3.0 - 8.0bar
Flow rate:	15.3 - 82.8m³/h
Spray range:	29 - 51m
Interface:	Flange, internal thread
Inclination angle:	44°
Weight:	8.3KG (9KG with flange)
Specification:	Box 90*23*27.5cm



PL35T

Turbospray gun with adjustable elevation angle

PRODUCT PARAMETERS	
Inlet diameter:	35mm
Nozzle diameter:	8 - 16mm
Pressure:	2.0 - 5.0bar
Flow rate:	4.5 - 21.4m³/h
Spray range:	20 - 35.5m
Spray height:	11.7 - 26.5m
Interface:	1.5 inch threaded interface
Inclination angle:	adjustable from 0 to 48°
Weight:	1.7kg per piece
Specification:	49*11.6*22CM per piece



PL35T-S

Turbo spray gun with adjustable elevation angle

PRODUCT PARAMETERS	
Inlet diameter:	35mm
Nozzle diameter:	8 - 16mm
Pressure:	2.0 - 5.0bar
Flow rate:	4.5 - 21.4m³/h
Spray range:	20 - 35.5m
Spray height:	11.7 - 26.5m
Interface:	1.5 inch threaded interface
Inclination angle:	adjustable from 0 to 48°
Weight:	1.7kg per piece
Specification:	32*19.5*19CM per piece



W-40 (8222)

Turbo worm type spray gun

PRODUCT PARAMETERS	
Inlet diameter:	40mm
Nozzle diameter:	10 - 24mm
Pressure:	2.0 - 6.0bar
Flow rate:	7 - 56m³/h
Spray range:	17 - 43m
Interface:	1.5 inch threaded interface
Tilt angle:	23°
Weight:	Box 5.2kg
Specification:	Box 60*23*20.5



W-50 (8225)

Turbo worm type spray gun

PRODUCT PARAMETERS	
Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm (default with 16-22mm)
Pressure:	2.0 - 8.0bar
Flow rate:	12.9 - 100m³/h
Spray range:	25 - 55m
Interface:	Flange
Inclination angle:	24°
Weight:	7.3kg (with flange 8kg)
Specification:	Box 81*22.5*28cm



PL40T-S

Adjustable pitch worm gear spray gun

PRODUCT PARAMETERS	
Inlet diameter:	40mm
Nozzle diameter:	10 - 24mm
Pressure:	2.0 - 6.0bar
Flow rate:	7 - 56m³/h
Range:	17 - 43m
Interface:	1.5 inch threaded interface
Tilt angle:	24-28° adjustable
Weight:	5.2KG
Specification:	Box 65*23*25.5cm



PL45T-S

Turbo spray gun with adjustable elevation angle

PRODUCT PARAMETERS	
Inlet diameter:	45mm
Nozzle diameter:	10 - 24mm
Pressure:	2.0 - 6.0bar
Flow rate:	7.2-56.8m³/h
Range:	19 - 46m
Connection:	flange and 1.5 inch threaded interface
Tilt angle:	0- 48°
Weight:	5.9KG (6.7KG with flange)
Specification:	Box 76.5*23*25.5cm

Big Gun Sprinkler



PL50T

Turbo spray gun with adjustable elevation angle

PRODUCT PARAMETERS	
Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm (default with 16-22mm)
Pressure:	2.0 - 8.0bar
Flow rate:	12.9 - 100m³/h
Range:	25 - 55m
Interface:	Flange
Tilt angle:	0-48°
Weight:	7.6kg (with flange 8.3kg)
Specification:	Box 81*22.5*28cm



PL55T-S

Multi-nozzle adjustable-elevation turbine spray gun

PRODUCT PARAMETERS	
Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm (default with 16-22mm)
Pressure:	2.0 - 8.0bar
Flow rate:	12.9 - 100m³/h
Spray range:	25 - 55m
Interface:	Flange
Tilt angle:	0-48°
Weight:	7.5kg (with flange 8.4kg)
Specification:	Box 81*22.5*28cm



PL65T-S

Turbo spray gun with adjustable elevation angle

PRODUCT PARAMETERS	
Inlet diameter:	50mm
Nozzle diameter:	14 - 30mm (default with 16-22mm)
Pressure:	2.0 - 8.0bar
Flow rate:	14.8 - 102m³/h
Range:	25 - 58m
Interface:	Flange
Tilt angle:	0-48°
Weight:	7.9kg (with flange 8.6kg)
Specification:	Box 90*22.5*28cm



PL75T-S

Turbo spray gun with adjustable elevation angle

PRODUCT PARAMETERS	
Inlet diameter:	70mm
Nozzle diameter:	18 - 36mm (default with 18-26mm)
Pressure:	2.0 - 8.0bar
Flow rate:	17.8 - 131.7m³/h
Range:	22 - 70m
Connection:	Flange
Tilt angle:	0-48° adjustable
Weight:	9.2kg (with flange9.0kg)
Specification:	Box 97*24.8*29.6cm

Big Gun Sprinkler







HSR-8200

Size	Pressure	Flux	Radiu	Material
1.5" (40,PY30)	3-5 kg	7-8 m³/h	17-23 m	Aluminum Core
2" (50,PY40)	4-6 kg	15-17 m³/h	23-30 m	Aluminum Core
2.5" (60,PY50)	4.5-7 kg	24-26 m³/h	34-36 m	Aluminum Core





HSR-8201

Size	Pressure	Flux	Radiu	Material
1" (25,PY20)	3-4 kg	4-5 m³/h	15-20 m	Brass Core
1.5" (40,PY30)	3-5 kg	7-8 m³/h	18-23 m	Brass Core
2" (50,PY40)	4-6 kg	15-17 m³/h	23-30 m	Brass Core
2.5" (60,PY50)	4.5-7 kg	24-26 m³/h	34-36 m	Brass Core



HSR-8203

Size	Pressure	Flux	Radiu	Material
1.5" (PY30)	2-4.5 kg	7-9 m³/h	20-25 m	Aluminum Core
2" (PY40)	3-5 kg	15-20 m³/h	25-30 m	Aluminum Core
2.5" (PY50)	3-5 kg	30-35 m³/h	30-40 m	Aluminum Core



HSR-8202

Size	Pressure	Flux	Radiu	Material
1.5" (PY30)	2-4.5 kg	7-9 m³/h	20-25 m	Brass Core
2" (PY40)	3-5 kg	15-20 m³/h	25-30 m	Brass Core
2.5" (PY50)	3-5 kg	30-35 m³/h	30-40 m	Brass Core

Big Gun Sprinkler





HSR-8210 (2"F)

Material: Aluminum Alloy
Base: Brass
Pressure: 1.5-5.0 kg
Flux: 9.5-39.4 m³/h
Radiu: 20-43 m



HSR-8212 (1.5"F)

Material: Aluminum Alloy
Base: Brass
Pressure: 2.0-6.0 kg
Flux: 9.1-31.9 m³/h
Radiu: 19-29 m



HSR-8213 (1"F)

Material: Aluminum Alloy
Base: Brass
Pressure: 1.5-4.0 kg
Flux: 1.2-6.1 m³/h
Radiu: 12-19.5 m



HSR-8214 (1.25"F /1.5"F)

Material: Aluminum Alloy
Base: Aluminum or Brass
Pressure: 3.5-5.0 kg
Flux: 14.3-16.5 m³/h
Radiu: 23-31 m



HSR-8213B (1"F)

Material: Aluminum
Base: Brass
Pressure: 1.5-4.0 kg
Flux: 1.8-3.6 m³/h
Radiu: 12-17 m



HSR-8217 (1.5"F)

Material: Aluminum
Base: Brass
Pressure: 2.0-5.0 kg
Flux: 5.1-24.8 m³/h
Radiu: 16-29 m



HSR-80(3"Flang)

Material	Pressure	Flux	Radiu
Aluminum Alloy	3.0-8.0 kg	58.4-170m³/h	48-78 m

Sprinkler Stand Series



HSR-1501A (1/2"M)

Material: Plastic



HSR-1505F (1/2"F)

Material: Plastic



HSR-1503D (1/2"F)

Material: zinc alloy



HSR-T8600 (1/2"F,3/4"M)

Material: stainless



HSR-T8605

Size: 1.5",2",2.5"

Height: 120cm or customized



HSR-T8603

Size: 1.5"

Height: 120cm or customized



HSR-T8602

Size: 2",3" flange

Height: 120cm/150cm/160cm



HSR-T8605C

Size: 1.5",2",2.5"

Height: 150cm or customized



HSR-T8606

Size: 3/4",1"

Height: 120cm or customized



HSR-T8607

Size: 3/4",1"

Height: 120cm or customized

POP-UP Sprinkler Series



HSR-8300 3/4"

Pressure: 1.5-3.0bar
Flux: 0.36-1.86m³/h
Radius: 6-13M



HSR-8301D(1/2"F)

Pressure: 2-4.0bar
Flux: 0.23-0.97m³/h
Radius: 6-8M



HSR-8305(1/2")

Pressure: 2-3.0bar
Flux: 0.5-1.5m³/h
Radius: 3-6M



HSR-8301A(1/2"F)

Pressure: 1.5-3.0bar
Flux: 0.21-1.21m³/h
Radius: 1.2-5.5M



HSR-8301C(1/2"F)

Pressure: 2-4.0bar
Flux: 0.23-0.97m³/h
Radius: 6-8M



HSR-8310(3/4"F)

Pressure: 1.7-4.5bar
Flux: 0.07-3.23m³/h
Radius: 4.9-14M



HSR-8308

Pressure: 1.5-4.0bar
Flux: 0.95-1.13m³/h
Radius: 10-13M



HSR-8306(1/2")

Pressure: 1.0-3.0bar
Flux: 0.3-0.9m³/h
Radius: 5-7M



HSR-8307(3/4"F)

Pressure: 2-4.0bar
Flux: 0.3-2.3m³/h
Radius: 7-15M

HSR-8304(1/2")

Pressure: 1.5-4.0bar
Flux: 0.95-1.13m³/h
Radius: 10-13M





Replaceable sprinkler

Garden 3-Arm Sprinkler





HSR-A7300B



HSR-A7300C



HSR-A7305C



HSR-A7306D







material	Size	Pressure	Radius
ABS	1/2"	2-4 kg	2-10 M



HSR-A7307C



HSR-7201C



HSR-7202C



HSR-7202H



HSR-7202A

Model	Dia.of base	Connection size	Max.Pressure	Radius
HSR-7201C	25cm	3/4"	6 kg	2.5-15 M
HSR-7202C	25cm	3/4"	6 kg	2.5-15 M
HSR-7202H	25cm	3/4"	6 kg	2.5-15 M



HSR-A7505D



HSR-A7505S



HSR-7506Y



HSR-7506H



HSR-7506A



HSR-7506F



HSR-S7507E



HSR-S7508E



HSR-S7511E



HSR-S7510E




HSR-7505



HSR-7506



HSR-7507







Model	size	Material	Pressure	Flux	Radius
HSR-7505	1/2"	brass	1.5-4 kg	150-680L/h	7-11 M
HSR-7506	1/2"	brass	1.5-4 kg	150-560L/h	7-11 M
HSR-7507	1/2"	brass	1.5-4 kg	150-560L/h	7-11 M

Mid-Range Sprinkler



HSR-5000



HSR-5002



HSR-5012A



HSR-5012B



HSR-5004

Model	Interface size	Flux	Pressure	Radius
HSR-5000	1/2"M	0.15-0.85m³/h	2.5-4 kg	3-7 M
HSR-5002	1/2"M	0.15-0.85m³/h	1.5-3 kg	3-5 M
HSR-5012(A,B)	1/2"M	0.15-0.85m³/h	1.5-3 kg	3-5 M
HSR-5004	1/2"M	0.8-1.3m³/h	1-2.5 kg	3-6 M




HSR-5006A



HSR-5006B



HSR-5007A



HSR-5007B

Model	Interface size	Flux	Pressure	Radius
HSR-5006(A,B)	3/4"F,1/2"M	0.6m³/h	1.5-2.5 kg	3-5.5 M
HSR-5007(A,B)	3/4"F,1/2"M	0.6m³/h	1.5-2.5 kg	3-5.5 M



HSR-5008A



HSR-5008B





HSR-5026





Model	Interface size	Flux	Pressure	Radius
HSR-5008(A,B)	3/4"F,1/2"M	0.6m³/h	1.5-2.5 kg	3-5.5 M
HSR-5026	1/2"	0.8-1.2m³/h	1-1.9 kg	0.8-12 M



HSR-5011

Size:1/2"
Pressure:1-3kg
Flux:0.2m³/h
Radius:3-6M



HSR-5016A

Size:1/2"
Pressure:1-3kg
Flux:0.6-1.5m³/h
Radius:5-8M



HSR-5016B

Size:3/4"F
Pressure:1-3kg
Flux:0.6-1.5m³/h
Radius:5-8M



HSR-5009

Size:3/4"
NozzleDia:6mm,8mm
Pressure:1-3kg
Flux:0.6-1.5m³/h
Radius:5-8M



HSR-5010

Size:3/4"
NozzleDia:4mm
Pressure:1-3kg
Flux:0.6-1.5m³/h
Radius:5-8M

Mid-Range Sprinkler










HSR-5024 **HSR-5025** **HSR-5023**

Model	Interface size	Flux	Pressure	Angle	Radius
HSR-5024	1/2"M	350,550,650L/h	2-4 kg	24°, 15°	7-11 M
HSR-5025	1/2"M	350,650L/h	2-3 kg	24°, 15°	7-12 M
HSR-5023	1/2"M	350,650L/h	2-4 kg	24°, 15°	7-12 M







HSR-5018A **HSR-5018B** **HSR-5013** **HSR-5015** **HSR-5022**

Model	Interface size	Flux	Pressure	Radius
HSR-5018(A,B)	1/2"M	350,550,650L/h	2-4 kg	7-11 M
HSR-5025	1/2"M	350,650L/h	2-3 kg	7-12 M
HSR-5022	1/2"M	0.16-0.52m3/h	1-2.5 kg	5-6 M








HSR-5019A **HSR-5019B** **HSR-5031A** **HSR-5031B** **HSR-5033**

Model	Interface size	Flux	Pressure	Radius
HSR-5019(A,B)	1/2"M,3/4"M	0.8-2m3/h	1.4-4 kg	7-12 M
HSR-5031(A,B)	1/2"M,1/2"F	550L/h	1.5-2.5 kg	3-5 M
HSR-5033	1/2"M	500L/h	1.5-2.5 kg	2-4 M











M5004 **M5002** **M5012** **S5002A** **S5004** **S5008** **S5035**

Micro Sprinkler & Drippers Series


HSR-7000

Pressure:1.0-3.0bar
Flux:0-80L/h




HSR-7001

Pressure:1.0-3.0kg
Flux:4L/h,8L/h

HSR-7002

Pressure:1.0-3.0bar
Flux:4L/h




HSR-7003

Pressure:2.0-3.0bar
Flux:0-60L/h



HSR-7004

Pressure:1.0-3.0bar
Flux:0-100L/h




HSR-7005

Pressure:1.0-2.5bar
Flux:0-80L/h



HSR-7015

Pressure:1.0-3.0bar
Flux:4.0-14L/h




HSR-7008

Pressure:2.0-3.0bar
Flux:0-120L/h



HSR-7007A

Pressure:1.5-4.5bar
Flux:4.0L/h



HSR-7007B

Pressure:1.5-4.5bar
Flux:8.0L/h



HSR-7007C

Pressure:1.5-4.5bar
Flux:16.0L/h



HSR-7007D

Pressure:1.5-4.5bar
Flux:25.0L/h


180°


360°


refraction 360°




360° atomization




360° atomization

HSR-5301 HSR-5302

Pressure:1.5-3.0kg
Flux:30-45L/H
Radius:0.9-1.2m

HSR-5303

Pressure:1.5-3.0kg
Flux:40-55L/h

HSR-5033

Pressure:1.5-3.0kg
Flux:40-60L/h
Radius:1-1.5M






Spraying effect

HSR-5306A **HSR-5306B**






Spraying effect

HSR-5309A **HSR-5309B**

Model	Interface size	Flux	Pressure	Radius
HSR-5036(A,B)	1/2"M,3/4"F	35-160L/H	2-5 kg	3-5 M
HSR-5039(A,B)	1/2"M,3/4"F	0.5-1.0m3/h	1-3 kg	3-5 M

New G Type Serie



Product attribute

Pressure:2kg-3kg
Flux:35-200L/h
Radius:3.0-5.0M



HSR-5202



HSR-5202M



HSR-5202CS



HSR-5202CM



HSR-5203A



HSR-5203AM



HSR-5203B



HSR-5203CT



HSR-5204



HSR-5204T

Flux	Pressure	Radius
35-160L/h	2-2.5 kg	2.8-4.5M



HSR-5205



HSR-

Flux	Pressure	Radius
35-140L/h	2-2.5 kg	2.8-4M





HSR-5210



HSR-5211



HSR-5212



HSR-5213

Flux	Pressure	Radius
35-160L/h	2-2.5 kg	3-5M





HSR-5214



HSR-5214B

Flux	Pressure	Radius
35-160L/h	2-2.5 kg	2.8-4.5M



HSR-5216



HSR-5215



HSR-5215M



HSR-5215T

Flux	Pressure	Radius
35-160L/h	2-3 kg	0.2-1.5M

Micro Sprinkler Series




HSR-5219



HSR-5220



HSR-5222A



HSR-5222B

Model	Flux	Pressure	Radius
HSR-5219	90-140L/h	1.5-3 kg	2-3 M
HSR-5220	22-220L/h	1.5-3 kg	3-5 M
HSR-5222(A,B)	35-120L/h	2-2.5 kg	1.2-2 M




HSR-5203A





HSR-520AM




HSR-5225



HSR-5225G



Flux	Pressure	Radius
90-140L/h	2-2.5 kg	2-3M



HSR-5228



HSR-5231



HSR-5235



HSR-5236



HSR-5236B

Flux	Pressure	Radius
35-120L/h	2-2.5 kg	1.2-2M



HSR-5236C



HSR-5236D



Flux	Pressure	Radius
22-148L/h	2-2.5 kg	2.5-5M



HSR-5241



HSR-5237



Flux	Pressure	Radius
22-148L/h	2-3 kg	2.5-5M

Micro Sprinkler Series



HSR-5240



HSR-5240M

Flux	Pressure	Radius
22-220L/h	1.5-3 kg	3-5M







H5240 H5214 H5225 H5236 H5236A H5236B



HSR-5238B



HSR-5238M

Flux	Pressure	Radius
90-140L/h	1.5-3 kg	2-3M





H5225 H5214 M5203 S5205M S5202 S5226 S5236 S5237 S5202

Micro Sprinkler Series



HSR-5316



HSR-5317

Flux	Pressure	Radius
70-200L/h	2-3 kg	4-4.5M



HSR-M5318A



HSR-M5318B



Flux	Pressure	Radius
100-120L/h	2-3 kg	2-2.5M



HSR-5365A



HSR-5365B



HSR-5365C

Flux	Pressure	Radius
0-92.7L/h	0.1-0.2 kg	0.2M



HSR-5366A



HSR-5366B



HSR-5366C

Flux	Pressure	Radius
32.93L/h	0.15 kg	0.2M



HSR-5367A



HSR-5367B



HSR-5367C

Flux	Pressure	Radius
32.93L/h	0.15 kg	0.3M



HSR-5320A
(Dia.2.0mm)



HSR-5320B
(Dia.1.8mm)



HSR-5320C
(Dia.1.6mm)



Model	Flux	Pressure	Radius
5320A	70-200L/h	2-2.5kg	4-4.5M
5320B	50-200L/h	2-2.5kg	3-3.5M
5320C	35-160L/h	2-2.5kg	2-2.5M



Micro Sprinkler & Drippers Series



HSR-5350



HSR-5351





HSR-5352





HSR-5353

Model	Flux	Pressure	Radius
5350	35L/h	2-3 kg	0.7M
5351	45-55L/h	1.5-3 kg	1-1.5M
5352	45-55L/h	1.5-3 kg	1-1.5M
5353	6-7.65L/h	2.5-4 kg	0.9-1.2M



5354 5355



HSR-5370

Pressure:1.5-3.0kg
Flux:45-55L/h
Radius:1.0-1.5M









HSR-5356



HSR-5357



HSR-5358

Flux	Pressure	Radius
24.3-40.3L/h	2.5-4kg	0.9-1M



HSR-5359



HSR-5360



HSR-5361

Flux	Pressure	Radius
35L/h	2-3kg	0.7M

Drip Arrow



HSR-7600



HSR-7601



HSR-7602







HSR-7020
2LDrip Arrow



HSR-7506



HSR-7606



HSR-7603

HSR-7604



HSR-7607



HSR-7608

HSR-7517 **Spike** (11cm/15cm/20cm/30cm/50cm/60cm)



Insect Prevention Sprinkle Series



HSR-5036

Pressure:2kg-3kg
Flux:200L/h
Radius:4.5M



HSR-5035B

Pressure:2kg-3kg
Flux:50-280L/h
Radius:3-5.5M





HSR-5036B



HSR-5035T



HSR-5035D



HSR-5035M

Irrigation Weight Hammer



HSR-5810



HSR-5811



HSR-5812



HSR-5813



HSR-5814



HSR-5815

Anti-leak Valve Series



HSR-5820
(Φ6*6mm)



HSR-5821
(Φ6mm)



HSR-5822
(Φ0.75mm)



HSR-5823
(Φ6*6mm)



HSR-5824
(Φ7.5*7.5mm)



HSR-5825
(Φ7.5mm)



HSR-5826
(Φ6*6mm)



HSR-5827
(Φ6mm)



HSR-5828
(Φ6*6mm)



HSR-5829
(Φ6*7.5mm)



HSR-5830
(Φ65mm)



HSR-5831
(Φ7.5mm)

Mini Fittings-Micro Sprinkler



HSR-5850B
Connector
4*7mm



HSR-5850A
Connector
3*5mm



HSR-5851
Connector
(3*5mm/4*7mm)
(3*5mm/3*5mm)



HSR-5855
Connector
(4*7mm)



HSR-5853A
Connector
(3*5mm)



HSR-5853B
Connector
(4*7mm),outer
size:6mm



HSR-5853C
Connector
(4*7mm),
inner size:6mm



HSR-5853N
(new)
Connector
(4*7mm)
inner size:6mm



HSR-5857
Connector
(4*7mm)



HSR-5860
Barbed Tee
(3*5mm)



HSR-5861
Connector
(4*7mm)



HSR-5863
Reducing Tee
(4*7mm→3*5mm)



HSR-5865A
Barbed Tee
(3*5mm)



HSR-5865B
Equal Barbed Tee
(4*7mm)



HSR-5866
Equal Barbed
Tee
(4*7mm)





HSR-5864
Equal Tee
(4*7mm)



HSR-5867
Equal four
connector
(4*7mm)



HSR-5868
Equal four
connector
(4*7mm)



HSR-5870
Two pass water
splitter
(4*7mm)



HSR-5871
Two pass water
splitter
(3*5/4*7mm)



HSR-5872
Four pass water
splitter(3*5mm)



HSR-5875
five branches
centre holder



HSR-5885
Adaptor



HSR-5886
Reducing
Coupling
(6mm-7.5mm)



HSR-5880
End Plug
(4*7mm)



HSR-5881
End Plug
(9*12mm)



HSR-5892
Holder(Outer
Dia.7.5mm)
(9*12mm)



HSR-5897
Holder
(9*12mm)



HSR-5896
Single Holder
(9*12mm)



HSR-5882
End Plug(NEW)
(4*7mm)



HSR-5894
Single Holder
(4*7mm)



HSR-5890
Holder,(4*7mm)
(Outer Dia.6mm)



HSR-5891
Holder,4*7mm
(Outer Dia.7.5mm)



HSR-5893
Holder,(4*7mm)
(Outer Dia.7.5-
8mm)



HSR-5887(1/2")
Adaptor
(Inner dia.6mm)
(Outer Dia.6.0mm)
(outer Dia.7.5mm)



HSR-5888(1/2")
Adaptor



HSR-5889(1/2")
Adaptor



HSR-5895
Holder
(4*7mm)

Mini Fittings Series



HSR-5902
Fittings(8*11/4*6mm)



HSR-5903
Fittings(8*11/4*6mm)



HSR-5904
Fittings(8*11/4*6mm)



HSR-5905
Fittings(8*11/4*6mm)



HSR-5906
Fittings(8*11/4*6mm)



HSR-5912
Fittings(8*11/4*6mm)



HSR-5909
Fittings(8*11/4*7mm)



HSR-5907
Fittings(8*11mm)



HSR-5910
Fittings(8*11mm)



HSR-5911
Fittings(8*11/4*6mm)



HSR-5918
Fittings(8*11mm)



HSR-5915
Fittings(8*11mm)



HSR-5908
Fittings(8*11/4*7mm)



HSR-5901
Fittings(8*11mm)



HSR- 5913
Fittings(8*11mm)



HSR-5917
Fittings(8*11/4*6mm)



HSR-5916
Fittings(8*11mm)



HSR-5919
Fittings(8*11mm)

Mini Fittings for tape/Hose



HSR-2551A
Φ16*12mm



HSR-2552
Φ16*12mm



HSR-2553
Tape Plug Φ16mm



HSR-2554
Φ16*12mm



HSR-2555
Φ16mm



HSR-2556
Φ16mm



HSR-2561
Φ16mm(Dn17*12)



HSR-2561G
Φ16mm(Dn17*12)



HSR-2562
Φ16mm(Dn17*16)



HSR-2563
Φ16mm(Dn17)



HSR-2564
Φ16mm(Dn17)



HSR-2570
Tape Plug
Φ16mm(Dn17)



HSR-2571
Φ16mm(Dn17)



HSR-2572
Φ16mm(Dn17*15)



HSR-2573
Φ16mm(Dn17*16)



HSR-2574
Φ16mm(Dn17)



HSR-2575
Φ16mm (Dn17)



HSR-2576
Dn17*1/2",3/4"



HSR-2577
Dn16*17*16
Dn20*17*20
Dn25*17*25



HSR-2578
Dn17*16



HSR-2579
Dn17*16*17



HSR-2583
Φ16/20mm

HSR-2584
Φ16mm(Dn17*15)

HSR-2585
Φ16*16*1/2

HSR-2580
Φ16mm*1/2";16*/3/4
20*3/4"

HSR-2582
Φ16mm/20mm

HSR-2551
Φ16*15mm

HSR-2581
Φ16mm/20/25mm

Mini Fittings For Pipe

Mini Fittings for Pipe









HSR-2500	HSR-2510	HSR-2501	HSR-2502	HSR-2506	HSR-2505
Φ16*12/16*15/20*16mm	Φ16*15/20*15mm	Φ16mm	Φ20mm	Φ16mm;Φ20mm;Φ25mm	Φ16/20*1/2"








HSR-2507	HSR-2508	HSR-2519	HSR-2509	HSR-2518	HSR-2510
Φ16*16mm	Φ16*1/2"	Φ12/16/20	Φ16mm End Cap	Φ16/20mm End Cap	A:Φ16mm*1/2" or 3/4"; B:20*1/2" or 3/4"; C:25*3/4"

Mini Fittings for Pipe (16/20mm*0.8mm/1.0mm/1.2mm)






HSR-2520	HSR-2521	HSR-2522	HSR-2523	
Pipe Plug Φ16*16mm	Φ16*16mm	Φ16*1/2" Φ16*3/4"	Φ16(Dn16*15)	







HSR-2524	HSR-2525	HSR-2526	HSR-2527		HSR-2528
Φ16(Dn16)	Φ16(Dn16)	Φ16(Dn16)	Φ16(Dn16)		Φ16(Dn16)

Pipe clip



HSR-2600


φ12


φ16


φ20


φ25

Gromment

	HSR-2612RH	H type Rubber Grommet15*11mm
	HSR-2616RH	H type rubber Grommet with(17*12mm)
	HSR-2612RT	12mm rubber/T Type rubberGrommet with 15*12mm
	HSR-2616RT	T type rubber Grommet with(17*12mm)
	HSR-2620RT	T type 20mm rubber Grommet(20*17mm)

Tape Puncher









HSR-3801	HSR-3802	HSR-3803	HSR-3803C	HSR-3804	HSR-3806	HSR-3807
Φ8	Φ3	Φ15	Φ16/20/25/32	Φ3/4	Φ16/20	Φ14/16/25/32

Fittings Series

Fittings For Rain Hose/Main Hose





HSR-2315
Tail Clamp



HSR-2316
1" Valve（Φ25*28mm）



HSR-2320
Φ25/28/32/40mm Valve



HSR-2330
Φ25/28/32mm Valve



HSR-2301
Φ28(1") Φ38(1.5") Coupling



HSR-2302
Φ50(2") Tee



HSR-2304
Φ50 (2") 4-Way



HSR-2305
Φ50(2") Φ63(2.5") Elbow



HSR-2306
Φ50*41 (4-Way)



HSR-2312
Φ50*41 Tee



HSR-2307
Φ50*28 (2" *1")
Φ63*28 (2.5" *1") Tee



HSR-2308
Φ50*28 (2" *1")
Φ63*28 (2.5" *1") (4-way)



HSR-2309
Φ50*28 (2"*1")
Left/Right Elbow



HSR-2313
Φ28 (1") Tee



HSR-2310
Φ50*28 (2"'*1")
K 4-Way



HSR-2311
Φ50*28 (2"*1")
Elbow



HSR-2335

Dn25X1"	32X1"	32X1-1/4"
32X1-1/2"	40X1-1/4"	40X1-1/2"
45X1-1/4"	45X1-1/2"	45X2"
50X1-1/4"	50X1-1/2"	50X2"



HSR-2336
Dn25/32/40/45/50



HSR-2337
Dn25/32/4045//50



HSR-2338
1-1/2"





HSR-2339
2"

Fittings For Discharge Hose



ABS coupling



Model:HSR-2410
25mm 32mm 40mm 50mm 63mm
75mm 100mm 125mm 150mm
200mm 250mm 300mm

ABS Reducing



Model:HSR-2415
40×25mm 50×25mm 50×32mm
50×40mm 63×50mm 75×50mm
100×80mm

ABS coupling



Model:HSR-2420
50mm 63mm 75mm



Aluminium alloy Coupling



Model:HSR-2432
1" 1.2" 1.5" 2" 2.5"
3" 4" 5" 6" 8"



Model:HSR-2430
1" 1.2" 1.5" 2" 2.5"
3" 4" 5" 6"



Model:HSR-2433
1.5" 2" 2.5" 3"
4"

Aluminium alloy Reducing



Model:HSR-2435
1.2"-1" 1.5"-1" 1.5"-1.2" 2"-1"
2"-1.2" 2"-1.5" 2.5"-2" 3"-2"
3"-2.5" 4"-3"

Micro Valve Series

Material: POM	Item No.	Size	Material: POM	Item No.	Size	Material: POM	Item No.	Size
				HSR-2030	Φ16x1/2" 16*3/4"		HSR-2031	Φ16*12mm
				HSR-2034	Φ16*16mm		HSR-2032	Φ16*15mm
				HSR-2033	Φ16*12mm		HSR-2035	Φ16*16mm
	HSR-2003	Φ16*20mm		HSR-2003	Φ16*25mm		HSR-2003	Φ20*25mm
	HSR-2031	Φ16*16mm		HSR-2037	Φ16*16mm		HSR-2033	Φ16*15mm
	HSR-2038	Φ16*20mm		HSR-2001	Φ16*16mm Φ20*20mm		HSR-2001	Φ25*25mm
	HSR-2006	Φ20*15mm		HSR-2005	Φ16*16mm Φ16*20mm		HSR-2005	Φ16*25mm
	HSR-2002	Φ16x1/2" Φ16*3/4"		HSR-2002	Φ20x1/2" Φ20*3/4"		HSR-2002	Φ25x1/2" Φ25*3/4"
	HSR-2008	Φ16x16mm Φ16x20mm Φ16x25mm		HSR-2007	Φ16*12mm		HSR-2010	1/2"x1/2"
				HSR-2018	Φ4*7mm		HSR-2019	Φ9*12mm
				HSR-2021	Φ9*12mm ↓ 1/2"			

Micro VALVE SERIES

Material:PP	Item No.	Size	Material:PP	Item No.	Size	Material:PP	Item No.	Size
	HSR-2087	Φ16x12mm		HSR-2083	Φ16x16mm		HSR-2085	Φ12*16mm Φ16*16mm
	HSR-2088	Φ16x1/2" Φ16*3/4"		HSR-2080	Φ16*16mm		HSR-2081	Φ12*16mm Φ12*20mm Φ12*25mm Φ16*16mm
	HSR-2081	Φ16*20mm Φ16*25mm Φ20*20mm Φ20*25mm		HSR-2082	1/2"*Φ16 1/2"*Φ20/25		HSR-2082	3/4"*Φ16 3/4"*Φ20/25
	HSR-2231	Φ16*16mm		HSR-2235	Φ16*16mm		HSR-2230	Φ16*1/2" Φ25*3/4"
	HSR-2234	Φ16x16mm		HSR-2233	Φ16*12mm Φ16*15mm		HSR-2237	Φ16*16mm
	HSR-2201	Φ16x16mm		HSR-2201	Φ20x20mm		HSR-2201	Φ25x25mm
	HSR-2206	Φ16*12mm		HSR-2206	Φ16*15mm		HSR-2206	Φ20*15mm
	HSR-2206	Φ16*15mm		HSR-2206	Φ20*15mm		HSR-2202	Φ20*3/4"
	HSR-2202	Φ25*3/4"		HSR-2202	Φ16*1/2"		HSR-2202	Φ16*3/4"
	HSR-2208	Φ16*16mm		HSR-2208	Φ20*16mm		HSR-2208	Φ25*16mm

Large Flow Valve Series

Material:PP	Item No.	Size	Material:PP	Item No.	Size	Material:PP	Item No.	Size
	HSR-2101	Φ20*20mm Φ25*25mm		HSR-2106	Φ20*20mm Φ25*25mm		HSR-2102	3/4"*20mm 3/4"*25mm
	HSR-2130	3/4"*20mm 3/4"*25mm		HSR-2135	Φ20*20mm Φ25*25mm		HSR-2133	Φ20*20mm Φ20*25mm Φ25*25mm

Garden Water Timer



HSR-T5530

Supply: 2*1.5'AA' Alkaline Batteries.
W.P.: 1-5kg.
WorkingTemperature : 0-60'C.



HSR-T5531

Supply: 2*1.5'AA' Alkaline Batteries.
W.P.: 1-5kg.
WorkingTemperature : 0-40'C.



HSR-T5502

Supply: 2*1.5'AA' Alkaline Batteries.
W.P.: 1-5kg.
WorkingTemperature : 0-50'C.



HSR-T5503

Supply: 2*1.5'AA' Alkaline Batteries.
W.P.: 1-8kg.
WorkingTemperature : 0-40'C.



HSR-T5515

Supply: 2*1.5'AA' Alkaline Batteries.
W.P.: 1-8kg.
WorkingTemperature : 0-40'C.



HSR-T5530

Supply: 2*1.5'AA' Alkaline Batteries.
W.P.: 1-8kg.
WorkingTemperature : 0-40'C.



HSR-T5510

Supply: 2*1.5'AA' Alkaline Batteries.
W.P.: 3-8kg.
WorkingTemperature : 0-50'C.



HSR-T5510B

Supply: 2*1.5'AA' Alkaline Batteries.
W.P.: 3-8kg.
WorkingTemperature : 0-50'C.



HSR-T5538

Supply: 2*1.5'AA' Alkaline Batteries.
W.P.: 3-8kg.
WorkingTemperature : 0-40'C.



HSR-T5538B

Supply: 2*1.5'AA' Alkaline Batteries.
W.P.: 3-8kg.
WorkingTemperature : 0-40'C.



HSR-T5580

Wif Irrigation Timer
Supply: 5V USB power cable
W.P.: 1.5-8kg.
WorkingTemperature : 0-60'C.



HSR-T5581

Wif Irrigation Timer
Supply: 4*1.5'AA' Alkaline Batteries.
W.P.: 1-8kg.
WorkingTemperature : 0-60'C.

Irrigation PVC Hose








HSR-1616



PVC LAYFLAT HOSE(new style)

ONE STEP PRODUCTION
PRODUCED BY MODERN NEW MACHINE




HSR-1615



PVC LAYFLAT HOSE

TWO STEPS PRODUCTION
PRODUCED BY TRADITIONAL MACHINE

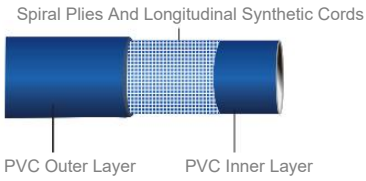

PVC CANVAS HOSE

HSR-1661







PVC Lining



Lining Color OEM



PE Lining Hose



Canvas Hose With Coupling



Rubber Lining



PU Lining



Lining Color OEM



Lining Color OEM

Irrigation PE Hose

Drip Tape
With Emitter









HSR-1601

Materialc	PE	wall Thinckness	0.16-0.5mm
Diameter	16mm	Drip Spacing	10-150cm
Wall Thickness	0.15-0.6mm	Flow Rate	2LH.2.5L/H, 3.0L/H4.0L/H
Working Pressure	50-100 Kpa/0.2mm	Roll Length	500-2000m per roll

Drip Hose With Emitter








HSR-1600


Materialc	PE	wall Thinckness	0.16-0.5mm
Diameter	16mm	Drip Spacing	10-150cm
Wall Thickness	0.15-0.6mm	Flow Rate	2LH.2.5L/H, 3.0L/H4.0L/H
Working Pressure	50-100 Kpa/0.2mm	Roll Length	500-2000m per roll

Rain Hose With Holes











HSR-1606

Materialc	PE		
Size	N30mm/dia.19mm(3/4") ; N40mm/dia.:25(1") N50/dia.31.8(1-1/4") ; N53/dia.33.7; N60/dia.:38(1.5") N63/dia.:39.4 ; N80/dia.:50mm(2") ; N160/dia.100(4") N100mm/dia.:63mm(2.5") ; N120mm/dia.76(3")		
Wall Thickness	0.16mm;0.18mm;0.2mm;0.3mm;0.35mm;0.4mm		
HolePatten	oblique1-7 holes	aperture(mm)	0.4-0.9mm
Pressure	50-150Kpa	Class Interval	10-20cm

Black Main Hose





HSR-1611

Materialc	PE
Size	1.5" 2" 2.5" 3" 4"
Folding Size(MM)	N60 N80 N100 N120 N160
Dia.:(MM)	38 50 63 76 100
Wall Thickness	0.8-3.0kgs
Working Pressure	50-100Kpa/0.2mm
Length	200m/Rolor 100m/Roll
Weight(kg/m)	0.05-0.42kgs/M

Irrigation Hose

Micro Hose





Size:9*12mm
4*7mm
3*5mm



Item no.:HSR-1608
Material :PVC

PE Hose





HSR-1650

Materialc	PE
Size	16mm*1.0mm or 1.2mm ; 20mm*1.3mm or 1.5mm; 25mm*1.5mm or1.8mm; 32mm*2.0mm ;40mm*2.5mm;50mm*2.8mm;60mm*3.5mm
Roll Length	1000m/Roll or 500m/Roll;300m /Roll;200m/Roll

PVC Garden Hose




HSR-1620


Materialc	PVC
size	1/4" 1/2" 5/16" 3/8"
Wall Thickness(mm)	6-14mm
Working Pressure(bar)	40 43 50 60 62

PVC Pressure Hose

HSR-1625



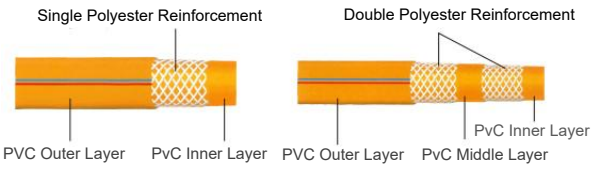

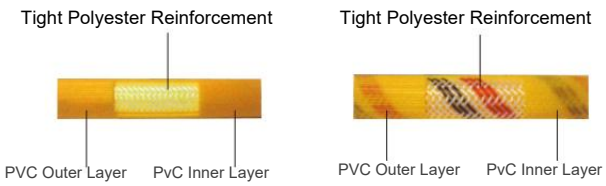



SPRAYING GUN

	HSR-1905A	▶Size:13.5*20cm; ▶Weight:177g; ▶Material:ABS+PVC; ▶Packaging:Tied Card;		HSR-1907	▶Size:14.5*20cm; ▶Weight:179g; ▶Material:ABS+PVC; ▶Packaging:Tied Card;
	HSR-1906	▶Size:11*17.5cm; ▶Weight:83g; ▶Material:ABS; ▶Packaging:Tied Card;		HSR-19031	▶Size:14*20cm; ▶Weight:194g; ▶Material:ABS+PVC; ▶Packaging:Tied Card;
	HSR-19040	▶Size:13*18cm; ▶Weight:90g; ▶Material:PP; ▶Packaging:Tied Card;		HSR-19021	▶Size:13.5*18cm; ▶Weight:137.5g; ▶Material:ABS+PVC; ▶Packaging:Tied Card;
	HSR-050	▶Garden Water Gun for **Five** Nozzles ▶Garden Water Gun for **Four** Nozzles ▶Garden Water Gun for **Three** Nozzles		HSR-050B	▶Garden Water Gun for **Five** Nozzles ▶Garden Water Gun for **Four** Nozzles ▶Garden Water Gun for **Three** Nozzles
	HSR-050Y	▶Garden Water Gun for **Six** Nozzles ▶Garden Water Gun for **Five** Nozzles ▶Garden Water Gun for **Four** Nozzles ▶Garden Water Gun for **Three** Nozzles		HSR-060	▶Garden Water Gun for **1" -1. 2"** size ▶Garden Water Gun for **1.5-2"** size
	HSR-050T	▶Garden Water Gun for **Two** Nozzles		HSR-070	▶Garden Water Gun for **400 mesh** ▶Garden Water Gun for **600** mesh ▶Garden Water Gun for **1000** mesh ▶Garden Water Gun for **2000** mesh

PVC Ball Valve Series

SOCKET

unit:mm

SIZE / D	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
CNS	22	26	34	42	48	60	76	89	114
JIS	22	26	34	42	48	60	76	89	114
DIN	20	25	32	40	50	63	75	90	110
BS	21.3	26.7	33.4	42.2	48.3	60.3	75	88.9	114.3
ANSI	21.3	26.7	33.4	42.2	48.3	60.3	75	88.9	114.3

THREAD

unit:teeth

SIZE / The/Inch	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
NPT	14	14	11.5	11.5	11.5	11.5	8	8	8
BSPT	14	14	11	11	11	11	11	11	11

PVC Compact Valve(socket)





Model	Size	Φ(mm)	DN
HSR-2801A	1/2"	20	15
HSR-2801A	3/4"	25	20
HSR-2801A	1"	32	25
HSR-2801A	1-1/4"	40	32
HSR-2801A	1-1/2"	50	40
HSR-2801A	2"	63	50
Model	Size	Φ(mm)	DN
HSR-2801C	2-1/2"	75	65
HSR-2801C	3"	90	80
HSR-2801C	4"	110	100





Model	Size	Φ(mm)	DN
HSR-2801B	1/2"	20	15
HSR-2801B	3/4"	25	20
HSR-2801B	1"	32	25
HSR-2801B	1-1/4"	40	32
HSR-2801B	1-1/2"	50	40
HSR-2801B	2"	63	50
Model	Size	Φ(mm)	DN
HSR-2801E	2-1/2"	75	65
HSR-2801E	3"	90	80
HSR-2801E	4"	110	100

PVC Compact Valve(thread)





Model	Size	Φ(mm)	DN
HSR-2802A	1/2"	20	15
HSR-2802A	3/4"	25	20
HSR-2802A	1"	32	25
HSR-2802A	1-1/4"	40	32
HSR-2802A	1-1/2"	50	40
HSR-2802A	2"	63	50
Model	Size	Φ(mm)	DN
HSR-2802C	2-1/2"	75	65
HSR-2802C	3"	90	80
HSR-2802C	4"	110	100





Model	Size	Φ(mm)	DN
HSR-2802B	1/2"	20	15
HSR-2802B	3/4"	25	20
HSR-2802B	1"	32	25
HSR-2802B	1-1/4"	40	32
HSR-2802B	1-1/2"	50	40
HSR-2802B	2"	63	50
Model	Size	Φ(mm)	DN
HSR-2802E	2-1/2"	75	65
HSR-2802E	3"	90	80
HSR-2802E	4"	110	100

PVC Ball Valve Series

Octagonal Ball Valve(thread)/PVC





Model	Size	Φ(mm)	DN
HSR-2804D	1/2"	20	15
HSR-2804D	3/4"	25	20
HSR-2804D	1"	32	25
HSR-2804D	1-1/4"	40	32
HSR-2804D	1-1/2"	50	40
HSR-2804D	2"	63	50
HSR-2804C	2-1/2"	75	65
HSR-2804C	3"	90	80
HSR-2804C	4"	110	100

Single Union Ball Valve/PVC

Socket



Model	Size	Φ(mm)	DN
HSR-2806	1/2"	20	15
HSR-2806	3/4"	25	20
HSR-2806	1"	32	25
HSR-2806	1-1/4"	40	32
HSR-2806	1-1/2"	50	40
HSR-2806	2"	63	50

Thread



Model	Size	Φ(mm)	DN
HSR-2808	1/2"	20	15
HSR-2808	3/4"	25	20
HSR-2808	1"	32	25
HSR-2808	1-1/4"	40	32
HSR-2808	1-1/2"	50	40
HSR-2808	2"	63	50

M/F Single Union Ball Valve/PVC





Model	Size	Φ(mm)	DN
HSR-2809	1/2"	20	15
HSR-2809	3/4"	25	20
HSR-2809	1"	32	25
HSR-2809	1-1/4"	40	32
HSR-2809	1-1/2"	50	40
HSR-2809	2"	63	50

True Union Ball Valve/PVC

Socket



Model	Size	Φ(mm)	DN
HSR-2805	1/2"	20	15
HSR-2805	3/4"	25	20
HSR-2805	1"	32	25
HSR-2805	1-1/4"	40	32
HSR-2805	1-1/2"	50	40
HSR-2805	2"	63	50

Thread



Model	Size	Φ(mm)	DN
HSR-2807	1/2"	20	15
HSR-2807	3/4"	25	20
HSR-2807	1"	32	25
HSR-2807	1-1/4"	40	32
HSR-2807	1-1/2"	50	40
HSR-2807	2"	63	50

Socket(2811) Thread(2812)



Model	Size	Φ(mm)	DN
2811/2812	1/2"	20	15
2811/2812	3/4"	25	20
2811/2812	1"	32	25
2811/2812	1-1/4"	40	32
2811/2812	1-1/2"	50	40
2811/2812	2"	63	50

Female (New) Single Union Ball Valve/PVC



Model	Size	Φ(mm)	DN
HSR-2810	1/2"	20	15
HSR-2810	3/4"	25	20
HSR-2810	1"	32	25
HSR-2810	1-1/4"	40	32
HSR-2810	1-1/2"	50	40
HSR-2810	2"	63	50


Two Pieces Ball Valve/PVC





Model Handle type	Size	Φ(mm)	DN
2850(SS) 2851(IRON)	1/2"	20	15
	3/4"	25	20
	1"	32	25
	1-1/4"	40	32
	1-1/2"	50	40
	2"	63	50


Foot Valve

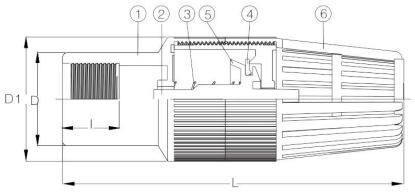



No.	Parts	Material	QTY
1	BODY	U-PVC	1
2	O-RING	NBR/EPDM	1
3	SPRING	SS201	1
4	GATE	U-PVC	1
5	SEAT SEAL	TPE	1
6	BODY	U-PVC	1

Item	Size	d3	D	D1	I	L
FV2860	3/4"	22	36	43.5	32	143
	1"	26	41	54	32.8	152
	1-1/4"	26	49.3	54	37	156
	1-1/2"	44	57.7	77.6	58.5	214.7
	2"	44	70.2	77.6	63.5	216.7






No.	Parts	Material	QTY
1	BODY	U-PVC	1
2	O-RING	NBR/EPDM	1
3	GATE	U-PVC	1
4	PIN	SS201	8
5	BOLT	SS201	8
6	SCREW	SS201	1
7	SEAT SEAL	TPE	1
8	BODY	U-PVC	1

Item	Size	d3	D	D1	I	L
FV2862	2-1/2"	60	88.7	169	61	251
	3"	78	103.6	184	77.6	293
	4"	78	132	184	77.8	295

New Foot Valve






No.	Parts	Material	QTY
1	BODY	U-PVC	1
2	SPRING	SS201	1
3	O-RING	NBR/EPDM	2
4	BALL	U-PVC	1
5	SEAT CARRIER	U-PVC	1
6	UNION NUT	U-PVC	1
7	BODY	U-PVC	1

Item	Size	d3	D	D1	I	L
FV2861	1/2"	22	30.02	50.38	17.67	108.24
	3/4"	22	36.43	60.8	21.36	118.57
	1"	26	42.12	68.16	22.64	131.62
	1-1/4"	26	53.06	82.4	31.79	158.23
	1-1/2"	44	61.12	98.02	30.91	182
	2"	44	75.1	114.9	43	263.38
	2-1/2"	60	90	131.6	49	318.76
	3"	78	107.5	166.67	55	356.19
	4"	78	134.61	198.22	64.49	436.62

New Check Valve






No.	Parts	Material	QTY
1	BODY	U-PVC	1
2	SPRING	SS201	1
3	O-RING	NBR/EPDM	2
4	BALL	U-PVC	1
5	SEAT CARRIER	U-PVC	1
6	UNION NUT	U-PVC	1
7	BODY	U-PVC	1

Item	Size	d3	D	D1	I	L
CV2865	1/2"	22	30.02	50.38	17.67	83.55
	3/4"	22	36.43	60.8	21.36	90.75
	1"	26	42.12	68.16	22.64	99.5
	1-1/4"	26	53.06	82.4	31.79	119.88
	1-1/2"	44	61.12	98.02	30.91	135.56
	2"	44	75.1	114.9	43	186.18
	2-1/2"	60	90	131.6	49	215
	3"	78	107.5	166.67	55	252.33
	4"	78	134.61	198.22	64.49	302.14

PVC BS thread pipes and fittings Series

PVC-U Pipes


Model:HS-2900

size(mm)	D(mm)	Z(mm)	L(mm)
1/2"	21.34	2.77	4
3/4"	26.67	2.87	4
1"	33.40	3.38	4
1-1/4"	42.16	3.56	4
1-1/2"	48.26	3.68	4
2"	60.32	4.2	4
2-1/2"	73.02	5.16	4
3"	88.90	5.49/5.7	4
4"	114.3	6.02/7.3	4

Female Elbow


Model:HS-2901

size(mm)	M	Z(mm)	L(mm)
1/2"	1/2"	17	28
3/4"	3/4"	19	32
1"	1"	22	38
1-1/4"	1-1/4"	26.5	46
1-1/2"	1-1/2"	26.5	50
2"	2"	31.5	61
2-1/2"	2-1/2"	32	74.5
3"	3"	36	85
4"	4"	40	99.5

Male Coupling


Model:HS-2902

size(mm)	M	Z(mm)	L(mm)
1/2"	1/2"	42	8
3/4"	3/4"	44	8
1"	1"	50	8
1-1/4"	1-1/4"	56	9
1-1/2"	1-1/2"	58	9
2"	2"	65	9
2-1/2"	2-1/2"	78	10
3"	3"	84	10
4"	4"	90	10

Female Tee


Model:HS-2903

size(mm)	L(mm)	H(mm)	Z(mm)	M
1/2"	84	42	8	1/2"
3/4"	88	44	8	3/4"
1"	100	50	8	1"
1-1/4"	112	56	9	1-1/4"
1-1/2"	116	58	9	1-1/2"
2"	130	65	9	2"
2-1/2"	158	78	10	2-1/2"
3"	168	84	10	3"
4"	180	90	10	4"

Female Reducing Tee


Model:HS-2904

size(mm)	L(mm)	H(mm)	L(mm)	M
3/4"x1/2"	58	29	19	3/4"
1"x1/2"	68	33	22	1"
1"x3/4"	72	36	22	1"

Female Coupling


Model:HS-2905

size(mm)	L(mm)	Z(mm)	M
1/2"	37	3	1/2"
3/4"	40	3	3/4"
1"	47	3	1"
1-1/4"	51.5	3.5	1-1/4"
1-1/2"	53.5	3.5	1-1/2"
2"	59.5	3.5	2"
2-1/2"	72	4	2-1/2"
3"	78	4	3"
4"	84	4	4"

Male & Female Elbow


Model:HS-2913

size(mm)	D(mm)	Z(mm)	L(mm)
1/2"	17	28	35
3/4"	19	32	37
1"	22	38	43
1-1/4"	26.5	46	51
1-1/2"	26.5	50	56
2"	31.5	61	66
2-1/2"	32	74.5	80
3"	36	85	92
4"	40	99.5	107

Female Reducing Tee


Model:HS-2906

size(mm)	L(mm)	Z(mm)	M
3/4"x1/2"	39	22.5	3/4"
1"x1/2"	42	25.5	1"
1"x3/4"	42	25.5	1"

Male Plug


Model:HS-2907

size(mm)	L(mm)	Z(mm)	M
1/2"	27	17	1/2"
3/4"	30	19	3/4"
1"	35	22	1"
1-1/4"	38.5	26.5	1-1/4"
1-1/2"	39.5	26.5	1-1/2"
2"	46.5	31.5	2"

Female Elbow


Model:HS-2910

size(mm)	L(mm)	Z(mm)	M
1/2"	44	48	1/2"
3/4"	50	55	3/4"
1"	61	64	1"
1-1/4"	72	78	1-1/4"
1-1/2"	81	86	1-1/2"
2"	93	102	2"
2-1/2"	101	136	2-1/2"
3"	114	152	3"
4"	144	182	4"

PVC-U Pipes


Model:HS-2908



size(mm)	M	L(mm)	Z(mm)
3/4"x1/2"	3/4"	8	26
1"x2"	1"	8	30
1"x3/4"	1"	8	30
1-1/4"x3/4"	1-1/4"	9	36
1-1/4"x1"	1-1/4"	9	36
1-1/2"x3/4"	1-1/2"	10	36
1-1/2"x1"	1-1/2"	10	37
1-1/2"x1-1/4"	1-1/2"	10	37
2"x1"	2"	11	43
2"x1-1/4"	2"	11	43
2"x1-1/2"	2"	11	43
2-1/2"x1-1/4"	2-1/2"	12	44
2-1/2"x1-1/2"	2-1/2"	12	44
2-1/2"x2"	2-1/2"	12	44
3"x1-1/2"	3"	13	49
3"x2"	3"	13	49
3"x2-1/2"	3"	13	49
4"x2-1/2"	4"	14	54
4"x3"	4"	14	54

Female Reducer


Model:HS-2909



size(mm)	L(mm)	Z(mm)	M
3/4"x1/2"	40	19	3/4"
1"x1/2"	45	22	1"
1"x3/4"	45	22	1"

Female Union Elbow


Model:HS-2911



size(mm)	L(mm)	L1(mm)	Z(mm)
1/2"	32	47	19
3/4"	38	55	22
1"	38	55	22

Female & Male Union Elbow

Model:HS-2912



size(mm)	L(mm)	L1(mm)	Z(mm)
1/2"	32	38	38
3/4"	58	65	65
1"	38	55	65

Elbow With Plate


Model:HS-2914



size(mm)	Z(mm)	L(mm)	M
1/2"	17	28	1/2"

Female & Male Adapter


Model:HS-2917



size(mm)	D(mm)	L(mm)	M
110	52.8	74.2	1"

Reduced Elbow


Model:HS-2916



size(mm)	Z(mm)	L(mm)	M	M1
3/4"x1/2"	19	31.0	3/4"	1/2"
1"x3/4"	**22**	35.4	1"	3/4"

Male Union


Model:HS-2918



size(mm)	Z(mm)	L(mm)	D(mm)	M
20x1/2"	21	60	64	1/2"
25x3/4"	21	62	70	3/4"
32x1"	21	64	80	1"
40x1-1/4"	26	68	86	1-1/4"
50x1-1/2"	29	73	94	1-1/2"
63x2"	35	79	103	2"

End Cap


Model:HS-2919



size(mm)	Z(mm)	L(mm)	M
1/2"	22	17	1/2"
3/4"	24	19	3/4"
1"	27	22	1"
1-1/4"	32	26.5	1-1/4"
1-1/2"	33	26.5	1-1/2"
2"	38	31.5	2"
2-1/2"	40	45	2-1/2"
3"	45	50	3"
4"	50	55	4"

Female And Male Union


Model:HS-2915



size(mm)	D(mm)	L(mm)	Z(mm)
1/2"	55	63	25
3/4"	64	78	26
1"	64	78	26
1-1/4"	78	83	26"
1-1/2"	186	88	29
2"	102	94	31
2-1/2"	136	109	43

Reducing Male Adapter

Model:HS-2920



size(mm)	Z(mm)	L(mm)	M
3/4"x1/2"	8	44	3/4"
1"x1/2"	8	47	1"
1"x3/4"	8	49	1"

PVC DIN Pressure Fittings Series

Reducer with copper threaded female

PN10



Model:HS-2928

Size：Φ(mm)
20x1/2" 25x1/2" 25x3/4" 32x1/2" 32x3/4"
32x1"

Coupling with threaded female

PN10/PN16



Model:HS-2929

Size：Φ(mm)
20x1/2" 25x1/2" 25x3/4" 32x1/2" 32x3/4" 32x1" 40x1-1/4"
50x1-1/2" 63x2" 75x2-1/2" 90x3" 110x4"

coupling with threaded male

PN10/PN16



Model:HS-2930

Size：Φ(mm)
20x1/2" 25x3/4" 32x1" 40x1-1/4"
50x1-1/2" 63x2" 75x2-1/2" 90x3" 110x4"

Coupling

PN10/PN16



Model:HS-2935

Size：Φ(mm)
20x20 25x25 32x32 40x40 50x50 63x63
75x75 90x90 110x110 125x125 140x140
160x160 200x200 225x225 250x250 315x315

Reducing coupling

PN10/PN16



Model:HS-2936

Size：Φ(mm)
25x20 32x20/25 40x20/25/32 50x25/32/40 63x25/32/40/50 75x32/40/50/63 90x40
90x50/63/75 110x50/63/75/90 125x110 140x125 160x90 160x110/125
200x110/125/160 225x200 250x110/160/200 315x110/160/200/250 400x160/200/250/315

90° Tee

PN10/PN16



Model:HS-2940

Size：Φ(mm)
PN10 20 25 32 40 50 63 75 90 110 125 140 160 200 225 250 315
PN16 20 25 32 40 50 63 75 90 110 140 160 225 280 315 355 400

Tee with brass threaded female

PN10



Model:HS-2938

Size：Φ(mm)
20x1/2" 25x1/2" 25x3/4" 32x1/2" 32x3/4" 32x1"

Tee with threaded female

PN10



Model:HS-2939

Size：Φ(mm)
20x1/2" 25x1/2" 25x3/4" 32x1/2" 32x3/4" 32x1"

Tee three-dimensional

PN10



Model:HS-2943

Size：Φ(mm)
20 25 32 40 50

PVC DIN Pressure Fittings Series

Four-Way

PN10



Model:HS-2944

Size：Φ(mm)
20 25 32 40 50

Elbow 90 with threaded female



Model:HS-2953

Size：Φ(mm)
20x1/2" 25x1/2" 25x3/4" 32x1/2" 32x3/4" 32x1"

Five Way

PN10



Model:HS-2948

Size：Φ(mm)
20 25 32 40 50

Elbow90° with copper threaded female

PN10



Model:HS-2954

Size：Φ(mm)
20x1/2" 25x1/2" 25x3/4" 32x1/2" 32x3/4" 32x1"

Elbow 90°

PN10/PN16



Model:HS-2950

Size：Φ(mm)
20 25 32 40 50 63 75 90 110 125 140
160 200 225 250 315

Elbow 45°

PN10/PN16



Model:HS-2952

Size：Φ(mm)
20 25 32 40 50 63 75 90 110 125 140 160 200 225 250 315

Union



Model:HS-2970

Size：Φ(mm)
PN10 20 25 32 40 50 63 75 90 110
PN16 20 25 32 40 50 63

Straight Cross



Model:HS-2945

Size：Φ(mm)
PN10 20 25 32 40 50 63 75 90 110 160 200
PN16 20 25 32 40 50 63 75 90 110 140 160 225

Reducing Elbow

PN10



Model:HS-2955

Size：Φ(mm)
25x20 32x20 32x25 40x20 40x25 40x32 50x20 50x25 50x32 50x40 63x25 63x32 63x40 63x50 75x32 75x40 75x50 75x63 90x40 90x50 90x63 90x75 110x50

PVC DIN pressure Fittings Series

Tee Y type

PN10



Model:HS-2942

Size：Φ(mm)

20 25 32 40 50 63 75

End Cap

PN10/PN16



Model:HS-2965

Size：Φ(mm)

20 25 32 40 50 63 75 90 110 125 140 160 200 225 250 315

Reducing Cross



Model:HS-2946

Size：Φ(mm)

PN10

40x20 40x25 40x32 50x20 50x25 50x32 50x40 63x20 63x25 63x32 63x40 63x50 75x20 75x25 75x32 75x40 75x50 75x63 90x20 90x25 90x32 90x40 90x50 90x63 90x75 110x20 110x25 110x32 110x40 110x50 110x63 110x75 110x90 160x32 160x63 160x75 160x90 160x110

PN16

50x32 90x50 90x63 110x50 110x63 140x50 110x63 140x75 160x63 160x75 160x90 160x110

Lateral Tee



Model:HS-2937

Size：Φ(mm)

PN10

20 25 32 40 50 63 75 90 110 160 160x110

PN16

50 63 75 90 110 140 160

Hose Connector

PN10/PN16



Model:HS-2960

Size：Φ(mm)

20x8 20x10 20x12 20x14 20x16 20x18 25x10 25x12 25x16 25x20 32x16 32x20 32x25 32x30

Reducing Ring

PN10/PN16



Model:HS-2975

Size：Φ(mm)

water supply

25x20 32x20 32x25 40x20 40x25 40x32 50x20 50x25 50x32 50x40 63x25 63x32 63x40 63x50 75x63 90x75 110x90

Industrial grade

25x20 32x25 40x25 40x32 50x20 50x32 50x40 63x20 63x25 63x32 63x40 63x50 75x25 75x32 75x50 75x63 90x32 90x40 90x50 90x63 90x75 110x50 110x63 110x75 110x90 125x110 140x110 140x125 160x63 160x75 160x90 160x110 160x140 200x160 200x180 225x160 225x200 225x225 280x225 280x250 315x280

PVC-U PIPES



Model:HS-2980

Size*Thickness:(mm)

PN10

20*1.8 25*1.8 32*2.0(PN12.5) 40*2.0 50*2.4 63*3.0 75*3.6 90*4.3 110*4.2 125*4.8 140*5.4 160*6.2 180*6.9 200*7.7 225*8.6 250*9.6 315*12.1 355*13.6 400*15.3

PN16

20*2.0 25*2.0 32*2.4 40*3.0 50*3.7 63*4.7 75*5.6 90*6.7 110*6.6 125*7.4 140*8.3 160*9.5 180*10.7 200*11.9 225*13.4 250*14.8 315*18.7 355*21.1 400*23.7

90° reducing Tee

PN10/PN16



Model:HS-2941

Size：Φ(mm)

25x20 32x20 32x25 40x20 40x25 40x32 50x20 50x25 50x32 50x40 63x20 63x25 63x32 63x40 63x50 70x20 75x25 75x32 75x40 75x50 75x63 90x20 90x25 90x32 90x40 90x50 90x63 90x76

PP Compression Fittings（PN16）

90° Tee



Model:HSR-2653

Size
20x20x20 25x25x25 32x32x32 40x40x40 50x50x50 63x63x63 75x75x75 90x90x90 110x90x110

90° Elbow



Model:HSR-2651

Size
20x20 25x25 32x32 40x40 50x50 63x63 75x75 90x90 110x110

Flanged adaptor



Model:HSR-2674

Size
40x11/2" 50x11/2" 50x2" 63x2" 63x21/2" 75x21/2" 75x3" 90x3" 90x4" 110x4"

Female tee with peg fitting



Model:HSR-2663

Size
32x3/4"x32

End plug



Model:HSR-2673

Size
20 25 32 40 50 63 75 90 110

Wall plate elbow fitting



Model:HSR-2670

Size
20x1/2" 20x3/4"

90° Male/female with brass threaded insert



Model:HSR-2667



Model:HSR-2668

Size
20x1/2" 20x3/4" 25x3/4" 32x1" 40x11/4" 50x11/2" 63x2"

90° Elbow with lateral threaded female take off



Model:HSR-2669

Size
20x25x1/2" 32x32x1/2" 32x32x3/4"

90° Tee with increased take off



Model:HSR-2655

Size
20x25x20 25x32x25 32x40x32 40x50x40

Male/Female adaptor with brass threaded insert

Male adaptor



Model:HSR-2671

Female adaptor



Model:HSR-2672

Size
20x1/2" 20x3/4" 32x1" 40x11/4" 50x11/2" 63x2"

90° Elbow with threaded male take off



Model:HSR-2666

Size
20x1/2" 20x3/4" 25x1/2" 25x3/4" 25x1" 40x1" 32x1/2" 32x3/4" 32x1" 32x11/4" 40x11/4" 40x11/2" 50x11/4"
50x11/2" 50x2" 63x11/2" 63x2" 63x21/2" 75x21/2 75x3" 90x3" 90x4" 110x4"

90° Reducing tee



Model:HSR-2652

Size
25x20x25 32x20x32 32x25x32 40x25x32 40x32x40 50x25x50 50x32x50 50x40x50
63x20x63 63x32x63 63x40x63 63x50x63 75x63x75 90x63x90 90x75x90 110x90x110

PP Compression Fittings (PN16)

Coupling



Model:HSR-2650

Size
20x20 25x25 32x32 40x40 50x50 63x63 75x75 90x90 110x110

Male adaptor



Model:HSR-2658

Size
20x1/2" 20x3/4" 20x1" 25x1/2" 25x3/4" 25x1" 32x1/2" 32x3/4" 32x1" 32x1-1/4" 40x1" 40x1-1/4" 40x1-1/2" 40x2" 50x1" 50x1-1/4" 50x1-1/2" 50x2"
63x1- 1/4" 63x1-1/2" 63x2" 63x2-1/2" 75x2" 75x2-1/2" 75x3" 90x2" 90x2-1/2" 90x3" 90x4" 110x2" 110x3" 110x4"

Reducing coupling



Model:HSR-2654

Size
25x20 32x20 32x25 40x25 40x32 50x25 50x32 50x40 63x25
63x32 63x40 63x50 75x50 75x63 90x63 90x75 110x90

Female adaptor



Model:HSR-2659

Size
20x1/2" 20x3/4" 20x1" 25x1/2" 25x3/4" 25x1" 32x1/2" 32x3/4" 32x1" 32x1-1/4" 40x1" 40x1-1/4" 40x1-1/2" 50x1-1/4" 50x1-1/2" 50x2"
63x1- 1/4" 63x1-1/2" 63x2" 63x2-1/2" 75x2" 75x2-1/2" 75x3" 90x2" 90x2-1/2" 90x3" 90x4" 110x3" 110x4"

90° Elbow with threaded female take off



Model:HSR-2662

Size
20x1/2" 20x3/4" 25x1/2" 25x3/4" 25x1" 32x1/2" 32x3/4" 32x1" 32x11/4"
40x3/4" 40x1" 40x11/4" 40x11/2" 50x11/4" 50x11/2" 50x2" 63x11/2" 63x2" 63x21/2"
75x2" 75x21/2" 75x3" 90x3" 90x4" 110x3" 110x4"

90° Tee with threaded male take off



Model:HSR-2660

Size
20x1/2"x20 20x3/4"x20 25x1/2"x25 25x3/4"x25 25x1"x25 32x1/2"x32
32x3/4"x32 32x1"x32 32x11/4"x32 40x1"x40 40x11/4"x40 40x11/2"x40
50x11/4"x50 50x11/2"x50 50x2"x50 63x11/2"x63 63x2"x63 63x21/2"x63
75x21/2"x75 75x3"x75 90x3"x90 90x4"x90 110x4"x110

90° Tee with threaded female take off



Model:HSR-2661

Size
20x1/2"x20 20x3/4"x20 25x1/2"x25 25x3/4"x25 25x1"x25 32x1/2"x32 32x3/4"x32 32x1"x32
32x11/4"x32 40x1"x40 40x11/4"x40 40x11/2"x40 50x1/2"x50 50x11/4"x50 50x11/2"x50 50x2"x50
63x11/4"x63 63x11/2"x63 63x2"x63 63x21/2"x63 75x2"x75 75x21/2"x75 75x3"x75
90x21/2"x90 90x3"x90 90x4"x90 110x3"x110 110x4"x110

Single Union Ball Valve PN16

Ball Valve PN16（Straight instert)



Model:HSR-2821

Size
20x20 25x25 32x32 40x40 50x50 63x63 75x75 90x90 110x110

Ball valve PN16(Female thread and ST)



Model:HSR-2820

Size
20x1/2" 25x3/4" 32x1“ 40x11/4" 50x11/2" 63x2"

Ball Valve PN16(male thread and ST)



Model:HSR-2822

Size
20x1/2" 25x3/4" 32x1" 40x11/4" 50x11/2" 63x2"

PP Compression Fittings（PN10）

Coupling



Model:HS-2650N

Size
20x20 25x25 32x32 40x40 50x50 63x63 75x75 90x90 110x110

Reducing coupling



Model:HS-2654N

Size
25x20 32x20 32x25 40x25 40x32 50x25 50x32 50x40 63x25
63x32 63x40 63x50 75x50 75x63 90x63 90x75 110x90

90° Tee



Model:HS-2653N

Size
20x20x20 25x25x25 32x32x32 40x40x40 50x50x50
63x63x63 75x75x75 90x90x90 110x110x110

90° Reducing tee



Model:HS-2652N

Size
25x20x25 32x20x32 32x25x32 40x25x40 40x32x40 50x25x50 50x32x50 50x40x50
63x25x63 63x32x63 63x40x63 63x50x63 75x63x75 90x63x90 90x75x90 110x90x110

90° with increased take off



Model:HS-2655N

Size
20x25x20 25x32x25 32x40x32 40x50x40

90° Elbow



Model:HS-2651N

Size
20x20 25x25 32x32 40x40 50x50 63x63 75x75 90x90 110x110

End plug



Model:HS-2673N

Size
20x20 25x25 32x32 40x40 50x50 63x63 75x75 90x90 110x110

Female adaptor



Model:HS-2659N

Size
20x1/2" 20x3/4" 20x1" 25x1/2" 25x3/4" 25x1" 32x1/2" 32x3/4" 32x1" 32x11/4" 40x1" 40x11/4"
40x11/2" 50x11/4" 50x11/2" 50x2" 63x11/4" 63x11/2" 63x2" 63x21/2" 75x21/2" 75x2" 75x3"s 90x2" 90x21/2" 90x3" 90x4" 110x3" 110x4"

90° Tee with threaded male take off



Model:HS-2660N

Size
20x1/2"x20 20x3/4"x20 25x1/2"x25 25x3/4"x25 25x1"x25 32x1/2"x32
32x3/4"x32 32x1"x32 32x11/4"x32 40x1"x40 40x11/4"x40 40x11/2"x40
50x11/4"x50 50x11/2"x50 50x2"x50 63x11/2"x63 63x2"x63 63x21/2"x63
75x21/2"x75 75x3"x75 90x3"x90 90x4"x90 110x4"x110

Male adaptor



Model:HS-2658N

Size
20x12" 20x3/4" 20x1 25x1/2" 25x3/4" 25x1" 32x1/2" 32x3/4"
32x1"32x114"40x1" 40x1114" 40x11/2" 40x2" 50x1" 50x11/4"
50x11/2" 50x2" 63x11/4" 63x11/2" 63x2" 63x21/2" 75x21/2"
75x2" 75x3" 90x2" 90x3" 90x4" 110x2" 110x3" 110x4"

90° Tee with threaded female take off



Model:HS-2661N

Size
20x1/2"x20 20x3/4"x20 25x1/2"25 25x3/4"x25 25x1"x25 32x1/2"x32
32x3/4"x32 32x1"x32 32x11/4"x32 40x1"x40 40x11/4"x40 40x11/2"x40
50x1/2"x50 50x11/4"x50 50x11/2"x50 50x2"x50 63x11/4"x63 63x11/2"x63
63x2"x63 63x21/2"x63 75x2"x75 75x21/2"x75 75x3"x75 90x21/2"x90
90x3"x90 90x4"x90 110x3"x110 10x4"x110

90° Elbow with threaded male take off



Model:HS-2665N

Size
20x1/2" 20x3/4" 25x1/2" 25x3/4" 25x1" 32x1/2" 32x3/4" 32x1"
32x11/4" 40x1" 40x11/4" 40x11/2" 50x11/4" 50x11/2" 50x2"
63x11/2" 63x2" 63x21/2" 75x21/2" 75x3" 90x3" 90x4" 110x4"

90° Elbow with threaded male take off



Model:HS-2666N

Size
20x1/2" 20x3/4" 25x1/2" 25x3/4" 25x1" 32x1/2" 32x3/4" 32x1"
32x11/4" 40x3/4" 40x1" 40x11/4" 40x11/2" 50x11/4" 50x11/2" 50x2"
63x11/2" 63x2" 63x21/2" 75x2" 75x21/2" 75x3" 90x3" 90x4" 110x3" 110x4"

Irrigation Clamp



HSR-3301



HSR-3302



HSR-3303



HSR-3304

25x1/2" 25x3/4" 32x1/2" 32x3/4" 32x1" 40x1/2" 40x3/4" 40x1" 50x1/2" 50x3/4" 50x1" 50x11/4" 63x1/2" 63x3/4" 63x1" 63x11/4" 63x11/2" 75x1/2" 75x3/4" 75x1" 75x11/4" 75x11/2" 75x2"
90x1/2" 90x3/4" 90x1" 90x11/4" 90x11/2" 90x2" 110x1/2" 110x3/4" 110x1" 110x11/4" 110x11/2" 110x2" 125x1/2" 125x3/4" 125x1" 125x11/4" 125x11/2" 125x2" 125x3"







HSR-3903
American type hose clamp







HSR-3901
Turn-key hose clamp (Galvanized Iron /Stainless steel)



HSR-3909
German Type Hose Clamp



HSR-3911



HSR-3912
Taiwan Type Hose Clamp With Thumb Scre



HSR-3902



HSR-3904
American Type Hose Clamp



HSR-3908
German Type Hose Clamp



HSR-3905
T-BOLT Hose Clamp



HSR-3906
Power type hose clamp



HSR-3907
Power type hose clamp



HSR-3913
Wire Clamp



HSR-3914
Spring Hose Clam



HSR-3917
One ea Hose Clamp



HSR-3952



HSR-3954
Pipe Clamp without Rubber



HSR-3953



HSR-3951
Pipe Clamp with Rubber



HSR-3981/3982
Pipe Clamp with Screw



HSR-3959



HSR-3961
Pipe Clamp without Rubber



HSR-3962



HSR-3995
Pipe Clamp without Rubbe



HSR-3966
Pipe Clamp without Screw

Irrigation Accessories



HSR-3405(male)
3/4"
Quick Coupling Valve



HSR-3406
3/4" 1" 2"
Quick Coupling Valve



HSR-3407
3/4" 1/2"
Quick Coupling Valve



HSR-3408
1"F&3/4"M Quick Coupling Valve



HSR-3501
6L ValveBox
(205*230*160mm）



HSR-3502
10LValveBox
(340*260*254mm)



HSR-3503
12L Valve Box
Bottom Length/Width:530/400mm
Top Length/Width:440/330mm
Height:315mm
WP:6630kn/m2



HSR-3504
14L Valve Box
Bottom Length/Width:675/495mm
Top Length/Width:565/405mm
Height:315mm
WP:5570kn/m2



HSR-3550
Drain Well Cover
Spec:260mm
WP:10395kn/m2
Inner metal ribs

HSR-3551
Drain Well Cover
Spec:330mm
WP:10395kn/m2
Inner metal ribs



HSR-3552
Drain Well Cover
Spec:400mm
WP:10395kn/m2
Inner metal ribs



HSR-3601

Swing Joint
Spec:1-1/2"*1-1/2"
(BSP/BSP)
WP:8.0Mpa
Length:30cm



HSR-3603

Swing Joint
Spec:1" *1-1/4"(BSP/BSP)
WP:8.0Mpa
Length:30cm



HSR-3604

Swing Joint
Spec:1" *1"(BSP/BSP)
WP:8.0Mpa
Length:30cm



HSR-3605

Swing Joint
Spec:1-1/4"*1-1/2"
(BSP/ACME)
WP:8.0Mpa
Length:30cm



HSR-3606

Swing Joint
Spec:1" *1-1/4"
(BSP/ACME)
WP:8.0Mpa
Length:30cm



HSR-3607

Swing Joint
Spec:1" *1"(BSP)splicing
WP:8.0Mpa
Length:55cm



HSR-920
1/2" PVC Bibcocks



HSR-921
1/2" PVC Bibcocks



HSR-922
1/2" PVC Bibcocks



HSR-923
1/2" PVC Bibcocks



HSR-924
1/2" PVC Bibcocks



HSR-925
1/2" PVC Bibcocks

Seeding Tray Series



HSR-6021
21Cells



HSR-6028/32
28Cells/32Cells



HSR-6050
50Cells



HSR-6072
72Cells




HSR-6105
105Cells



HSR-6128
128Cells/32Cells



HSR-6200
200Cells



HSR-6288
288Cells

HighSight Plastic co.,ltd.

www.hirrigation.com

Add whatsapp

Whatsapp +86 13857676628

Wechat +86 15990650166

elaine@chinahighsight.com

Elaine

Add whatsapp

Whatsapp +86 13738551897

Wechat +86 13738551897

breanna@chinahighsight.com

Breanna